
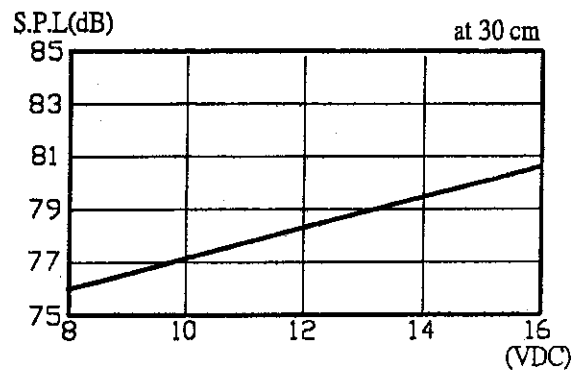


Tolerance: $\pm 0.5\text{mm}$

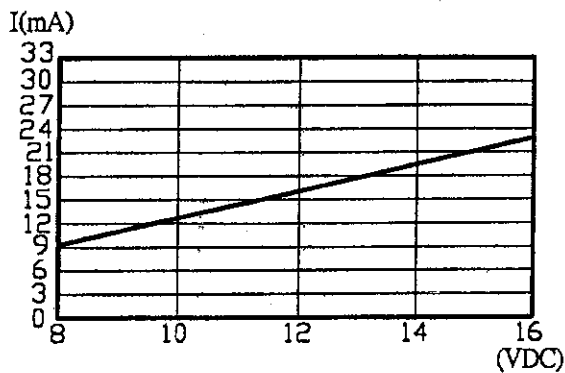

Operating Voltage (VDC)	8~16
Current Consumption at 12VDC(mA,maximum)	30
Sound Pressure Level at 30cm/12VDC (dB,minimum)	75
Tone	Continuous
Operating Temperature (C)	-20~+60
Storage Temperature (C)	-30~+70
Weight (Gram)	9.7

TITLE ELECTRONIC SOLID STATE AUDIO INDICATOR		PART NO. SEM-3612 (RoHS)
APPROVALS		DWG NO. SPO-1018
DRAWN: John 11/10/2007	SCALE: 1.5:1	MATERIAL ABS UL -94 1/16" HB
CHECKED: Bob 11/11/2007	UNIT: mm	
APPROVED: David 11/11/2007	EDITION: 3	
SHEET 1 OF 1		

SHOGYO

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com