
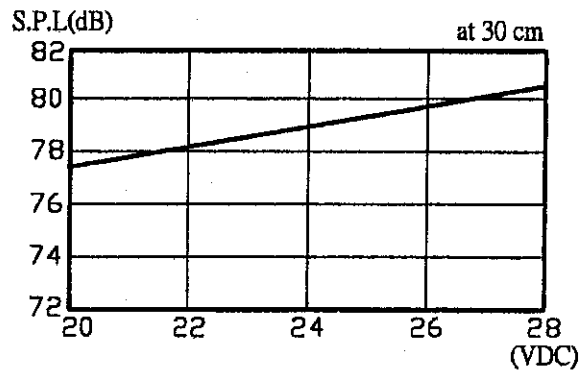


Tolerance: $\pm 0.5\text{mm}$

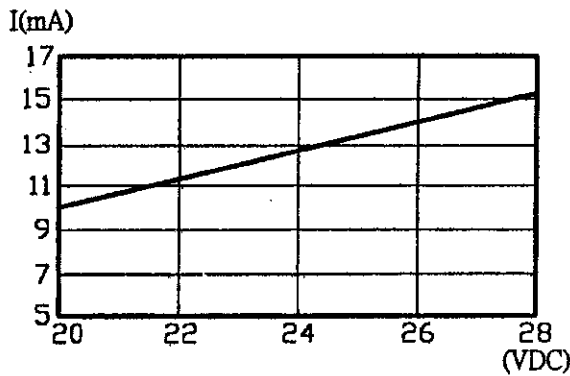

Operating Voltage (VDC)	20~28
Current Consumption at 24VDC(mA,maximum)	24
Sound Pressure Level at 30cm/24VDC(dB,minimum)	76
Tone	Continuous
Operating Temperature ($^{\circ}\text{C}$)	-20~+60
Storage Temperature ($^{\circ}\text{C}$)	-30~+70
Weight (Gram)	9.7

TITLE ELECTRONIC SOLID STATE AUDIO INDICATOR		PART NO. SEM-3624 (RoHS)
APPROVALS	SCALE: 1.5:1	DWG NO. SPO-1019
DRAWN: YEH 06' 10/25	UNIT: mm	MATERIAL ABS UL-94 1/16" HB
CHECKED: David 06' 10/25	EDITION: 3	
APPROVED: T.P.W.	SHEET 1 OF 1	

SHOGYO

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com