
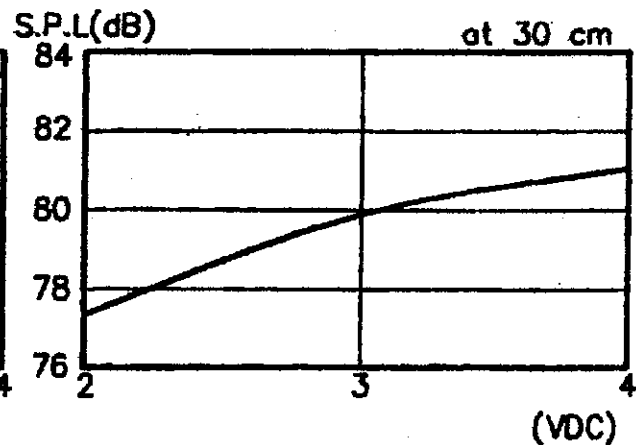


Tolerance: $\pm 0.5\text{mm}$

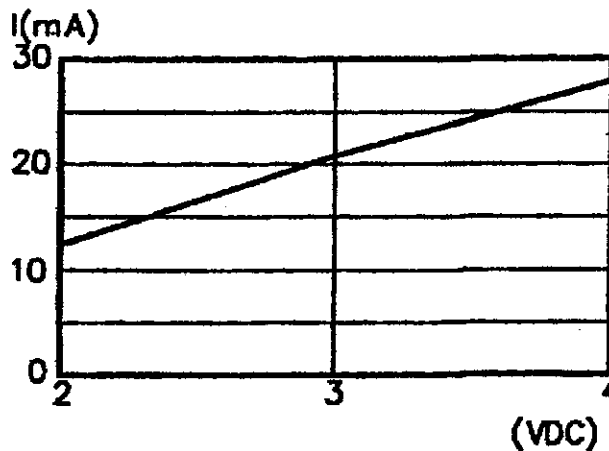

Operating Voltage (VDC)	2~4
Current Consumption (Operating Frequency at 3VDC(mA,maximum) at 400 +/- 100 HZ)	25
Sound Pressure Level at 30cm/3VDC (dB,minimum)	78
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	10

TITLE ELECTRONIC SOLID STATE AUDIO INDICATOR		PART NO. <i>SEM-6603 (RoHS)</i>
APPROVALS	SCALE: 1:1	DWG NO.
DRAWN: <i>FENG</i> 2005-6-30	UNIT: mm	
CHECKED: [Signature]	EDITION: 1	MATERIAL
APPROVED: [Signature]	SHEET 1 OF 1	ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com