
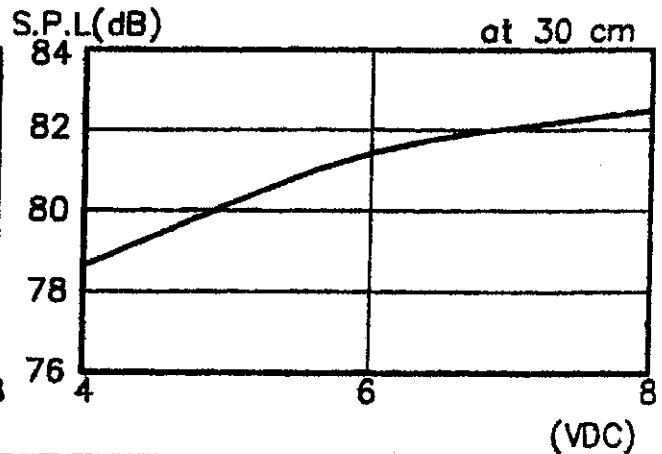


Tolerance: $\pm 0.5\text{mm}$

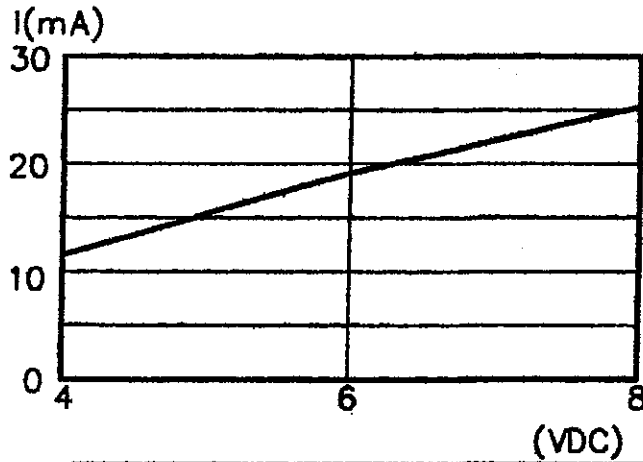

Operating Voltage (VDC)	4~8
Current Consumption at 6VDC(mA,maximum)	22
Sound Pressure Level at 30cm/6VDC (dB,minimum)	79
Tone	Continuous
Operating Temperature ($^{\circ}\text{C}$)	-20~+60
Storage Temperature ($^{\circ}\text{C}$)	-30~+70
Weight (Gram)	10.7

TITLE ELECTRONIC SOLID STATE AUDIO INDICATOR		PART NO. SEM-6606 (RoHS)	
APPROVALS	SCALE: 1:1	MATERIAL ABS UL-94 1/16" HB	
DRAWN: John 06/05/22	UNIT: mm		
CHECKED:	EDITION: 1		
APPROVED: [Signature]	SHEET 1 OF 1		

SHOGYO

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com