
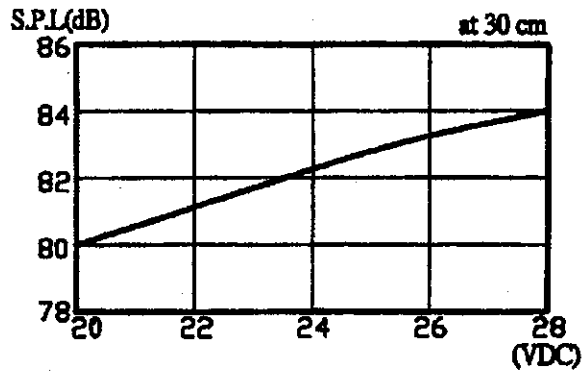


Unit:mm  
Tolerance: ±0.5mm

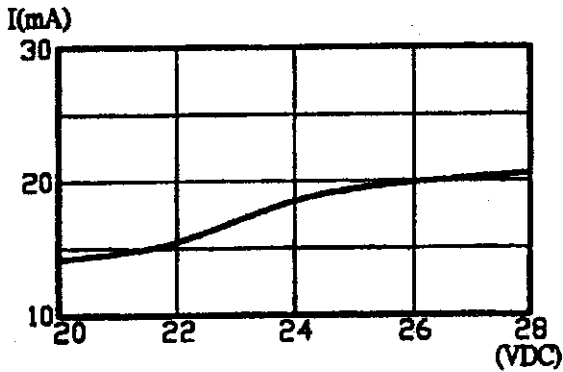

Operating Voltage (VDC)	20~28
Current Consumption at 24VDC(mA,maximum)	25
Sound Pressure Level at 30cm/24VDC (dB,minimum)	79
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	10

TITLE  
**ELECTRONIC SOLID STATE AUDIO INDICATOR**

PART NO. **SEM-6624 (RoHS)**

APPROVALS

SCALE: 1:1

DWG NO.

DRAWN: John 03/20/06'

UNIT: mm

CHECKED: BoB 03/20/06'

EDITION: 2

MATERIAL **ABS UL-94 1/16" HB**

APPROVED: David 03/20/06'

SHEET 1 OF 1

**SHOGYO**

SHOGYO INTERNATIONAL CORP.  
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
TEL: (516) 921-9111 • FAX: (516) 921-3777  
www.shogyo.com