



Unit:mm
Tolerance: ±0.5mm

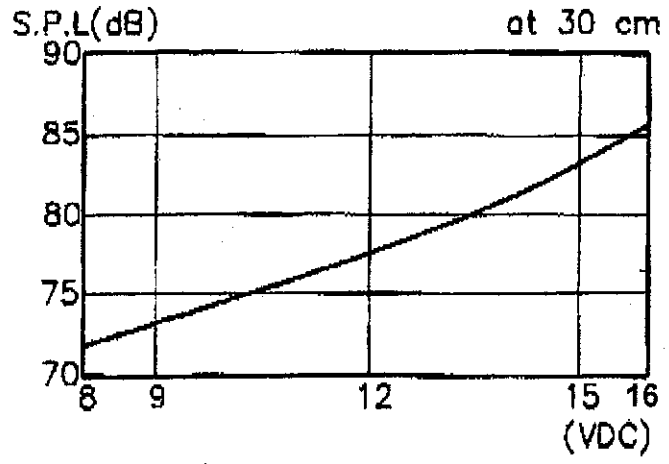

Operating Voltage (VDC)	8~16
Current Consumption at 12VDC(mA,maximum)	30
Sound Pressure Level at 30cm/12VDC (dB,minimum)	77
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	8.5

TITLE ELECTRONIC SOLID STATE AUDIO INDICATOR		PART NO. SEM-8612(RoHS)
APPROVALS		DWG NO.
DRAWN John 6/02/2006	SCALE 1:1	MATERIAL (White) ABS UL-94 1/16" HB
CHECKED	UNIT: TWT	
APPROVED David 6/02/2006	EDITION: 1	
	SHEET 1 OF 1	

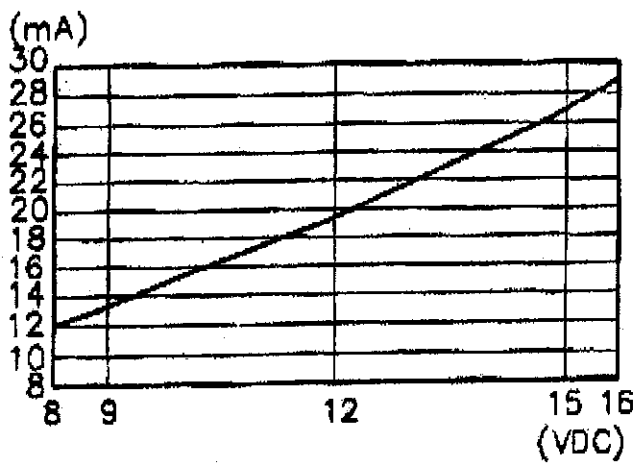

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com