
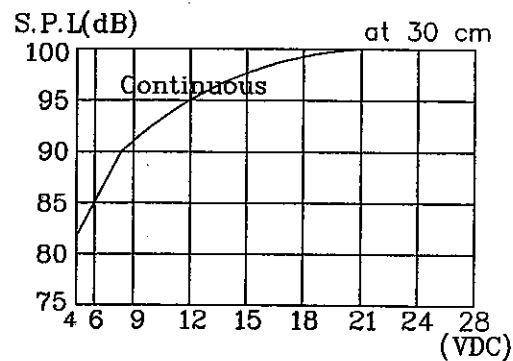


Unit: mm Tolerance:  $\pm 0.5$ mm

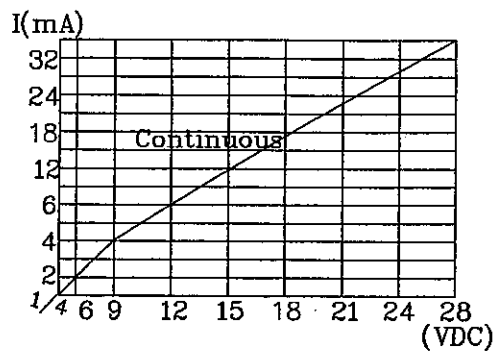

Oscillating Frequency (KHz)	3.6 $\pm$ 0.5
Operating Voltage (VDC)	4~28
Current Consumption at 12 VDC (mA)Min.	6
Sound Pressure Level at 12VDC/30cm (dB)	95
Tone	Continuous
Operating Temperature ( $^{\circ}$ C)	-20~+60
Storage Temperature ( $^{\circ}$ C)	-30~+70
Weight (Gram)	21.0

APPROVALS	SCALE: 1:1	MATERIAL (Gray Color) ABS UL-94 1/16" HB
DRAWN 2009 / 10 / 16	UNIT: mm	
CHECKED	EDITION: 1	
APPROVED	SHEET 1 OF 1	

**SHOGYO INTERNATIONAL CORP.**  
**# SEP-7750H (RoHS)**  
 PIEZO AUDIO INDICATOR