



PART NUMBERING KEY:

SHO-24W-XXX-YYY-Q-Z

SHO: SHOGYO

24W: 24 Watt Series

XXX: Indicates Output Voltage. Available from 5.0VDC – 48.0VDC (050 – 480)

YYY: Indicates Output Current. Available from 0.01A – 4.00A (001 – 400)

*Voltage multiplied by Current must equal a number no greater than the Wattage (24).


Q: Indicates Type of Input Prongs (1=United States, 2=European, 3=United Kingdom, 4=Australian)

Z: Indicates Type of Output Plug (2.5 x 5.5mm DC Plug, Strip & Tin, etc.)

EXAMPLE: 5V, 4A Power Supply with U.S. Input Prongs and a 2.1 x 5.5mm DC Plug = **SHO-24W-050-400-1-2.1 x 5.5mm DC Plug**

- **SPECIAL OPTIONS AND CUSTOM DESIGNS AVAILABLE (PLEASE CONTACT SHOGYO DIRECTLY AT INFO@SHOGYO.COM)**
- **CONTACT SHOGYO DIRECTLY FOR COMPLETE SPECIFICATIONS**



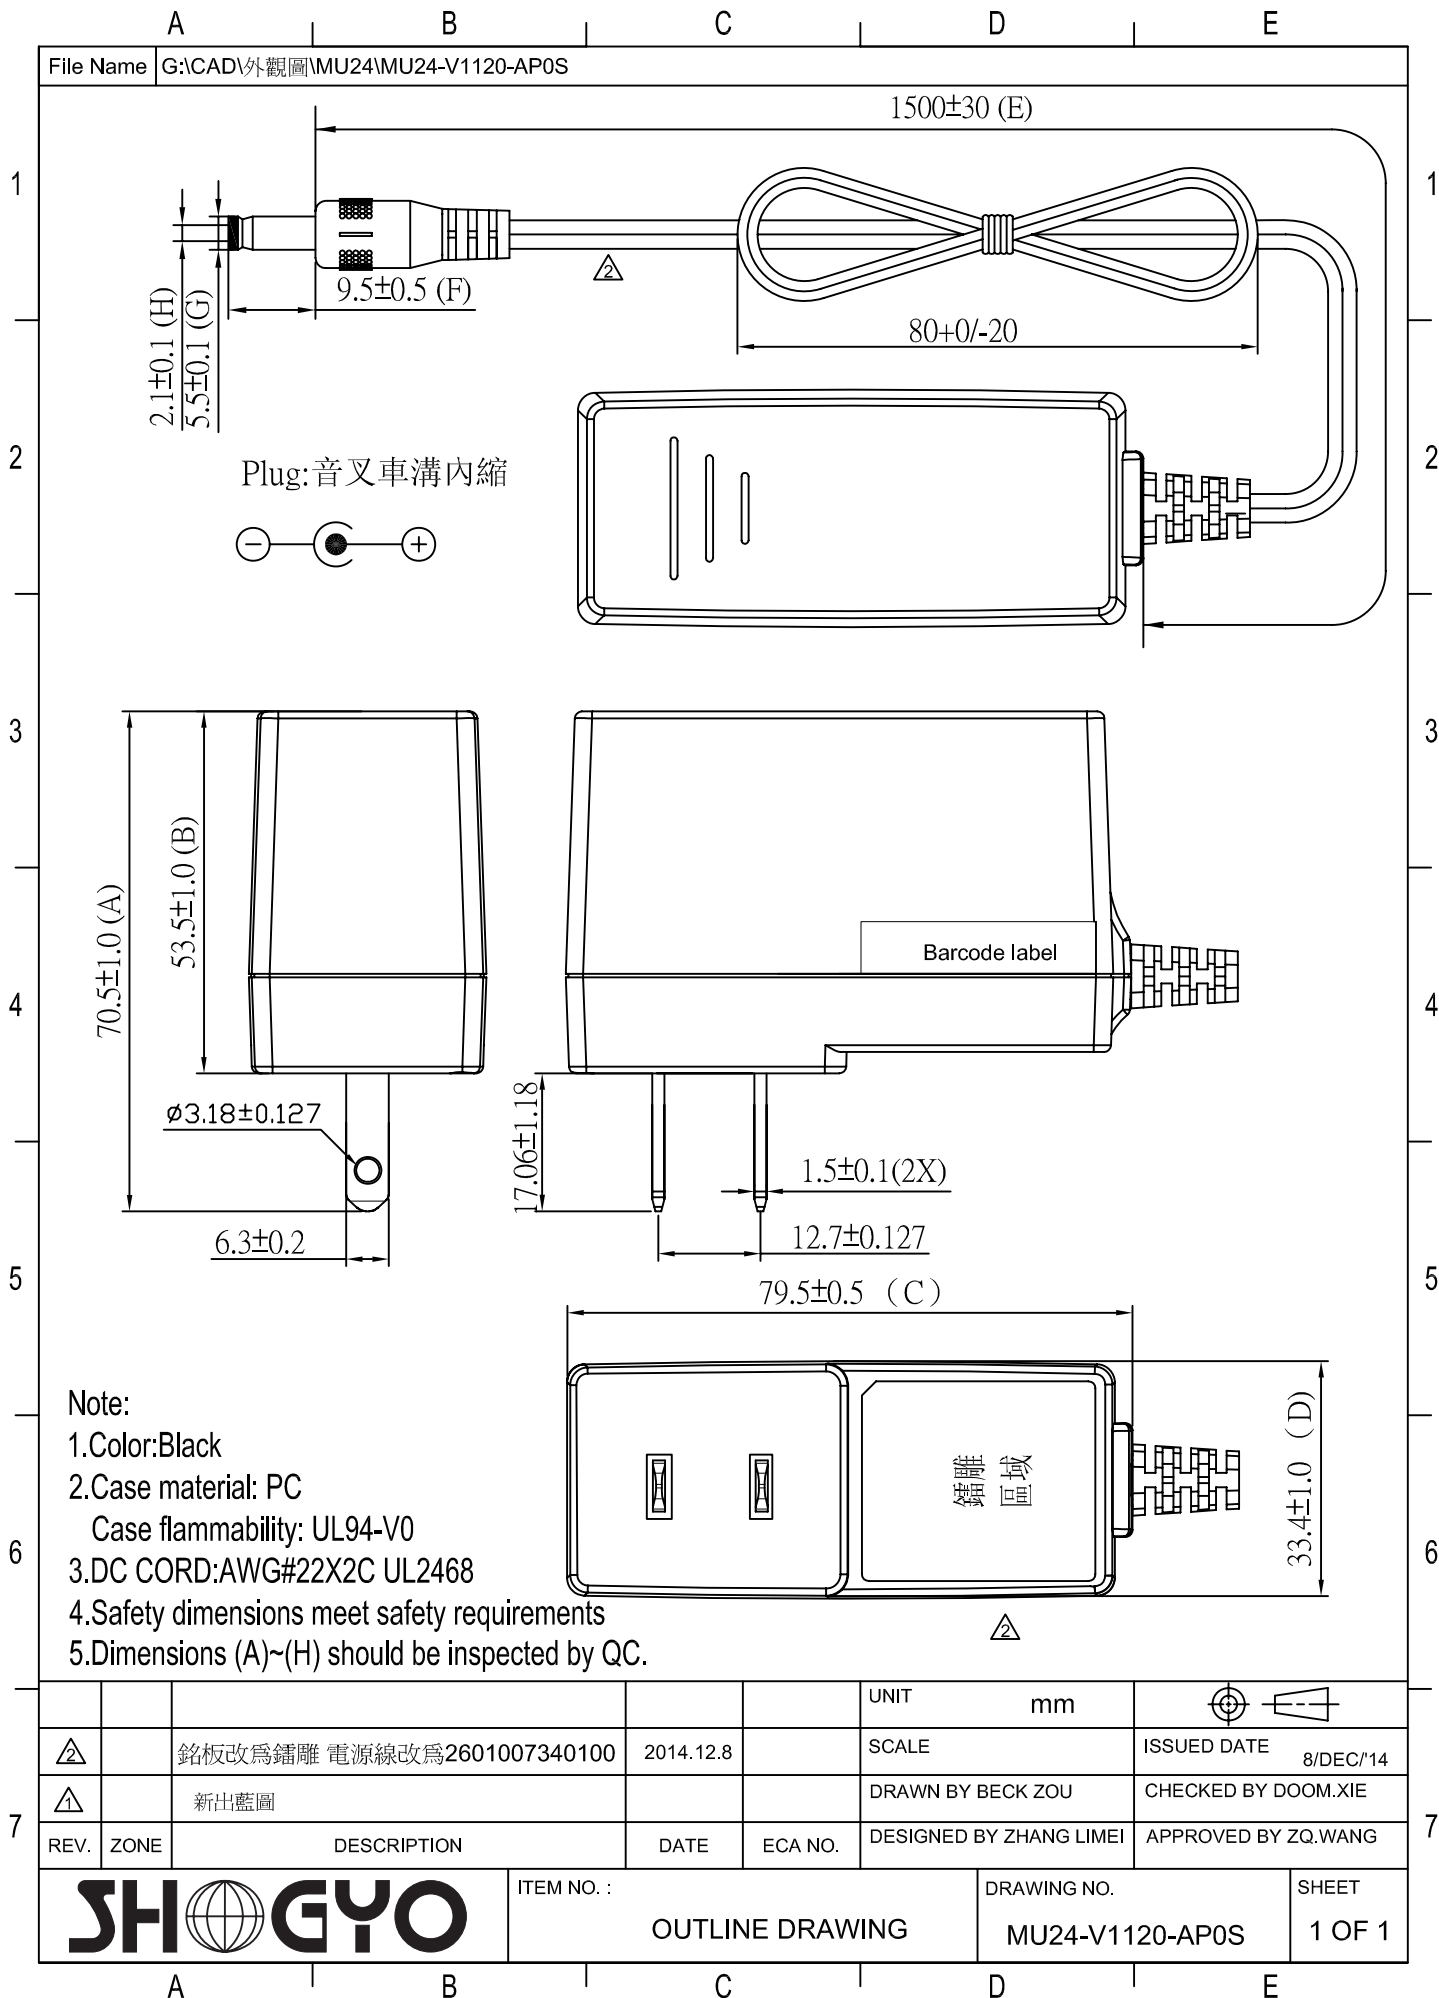

					UNIT	mm	
△		銘板改為鑄雕 電源線改為2601007340100	2014.12.8		SCALE		ISSUED DATE 8/DEC/'14
△		新出藍圖			DRAWN BY BECK ZOU		CHECKED BY DOOM.XIE
△					DESIGNED BY ZHANG LIMEI		APPROVED BY ZQ.WANG

REV.	ZONE	DESCRIPTION	DATE	ECA NO.	DRAWING NO.	SHEET
					MU24-V1120-AP0S	1 OF 1

SHIGYO

OUTLINE DRAWING

MU24-V1120-AP0S

1 OF 1

