



**PART NUMBERING KEY:**

**SHO-40WD-XXX-YYY-Q-Z**

**SHO:** SHOGYO

**40WD:** 40 Watt Desktop Series

**XXX:** Indicates Output Voltage. Available from 5.0VDC – 48.0VDC (050 – 480)

**YYY:** Indicates Output Current. Available from 0.01A – 6.00A (001 – 600)

\*Voltage multiplied by Current must equal a number no greater than the Wattage (40).


**Q:** Indicates Type of AC Input Cord (0=Without, 1=United States, 2=European, 3=United Kingdom, 4=Australian)

**Z:** Indicates Type of Output Plug (2.5 x 5.5mm DC Plug, Strip & Tin, etc.)

**EXAMPLE:** 12V, 3A Power Supply with USA Input Cord and a 2.1 x 5.5mm DC Plug = **SHO-40WD-120-300-1-2.1 x 5.5mm DC Plug**

- **SPECIAL OPTIONS AND CUSTOM DESIGNS AVAILABLE (PLEASE CONTACT SHOGYO DIRECTLY AT [INFO@SHOGYO.COM](mailto:INFO@SHOGYO.COM))**
- **CONTACT SHOGYO DIRECTLY FOR COMPLETE SPECIFICATIONS**



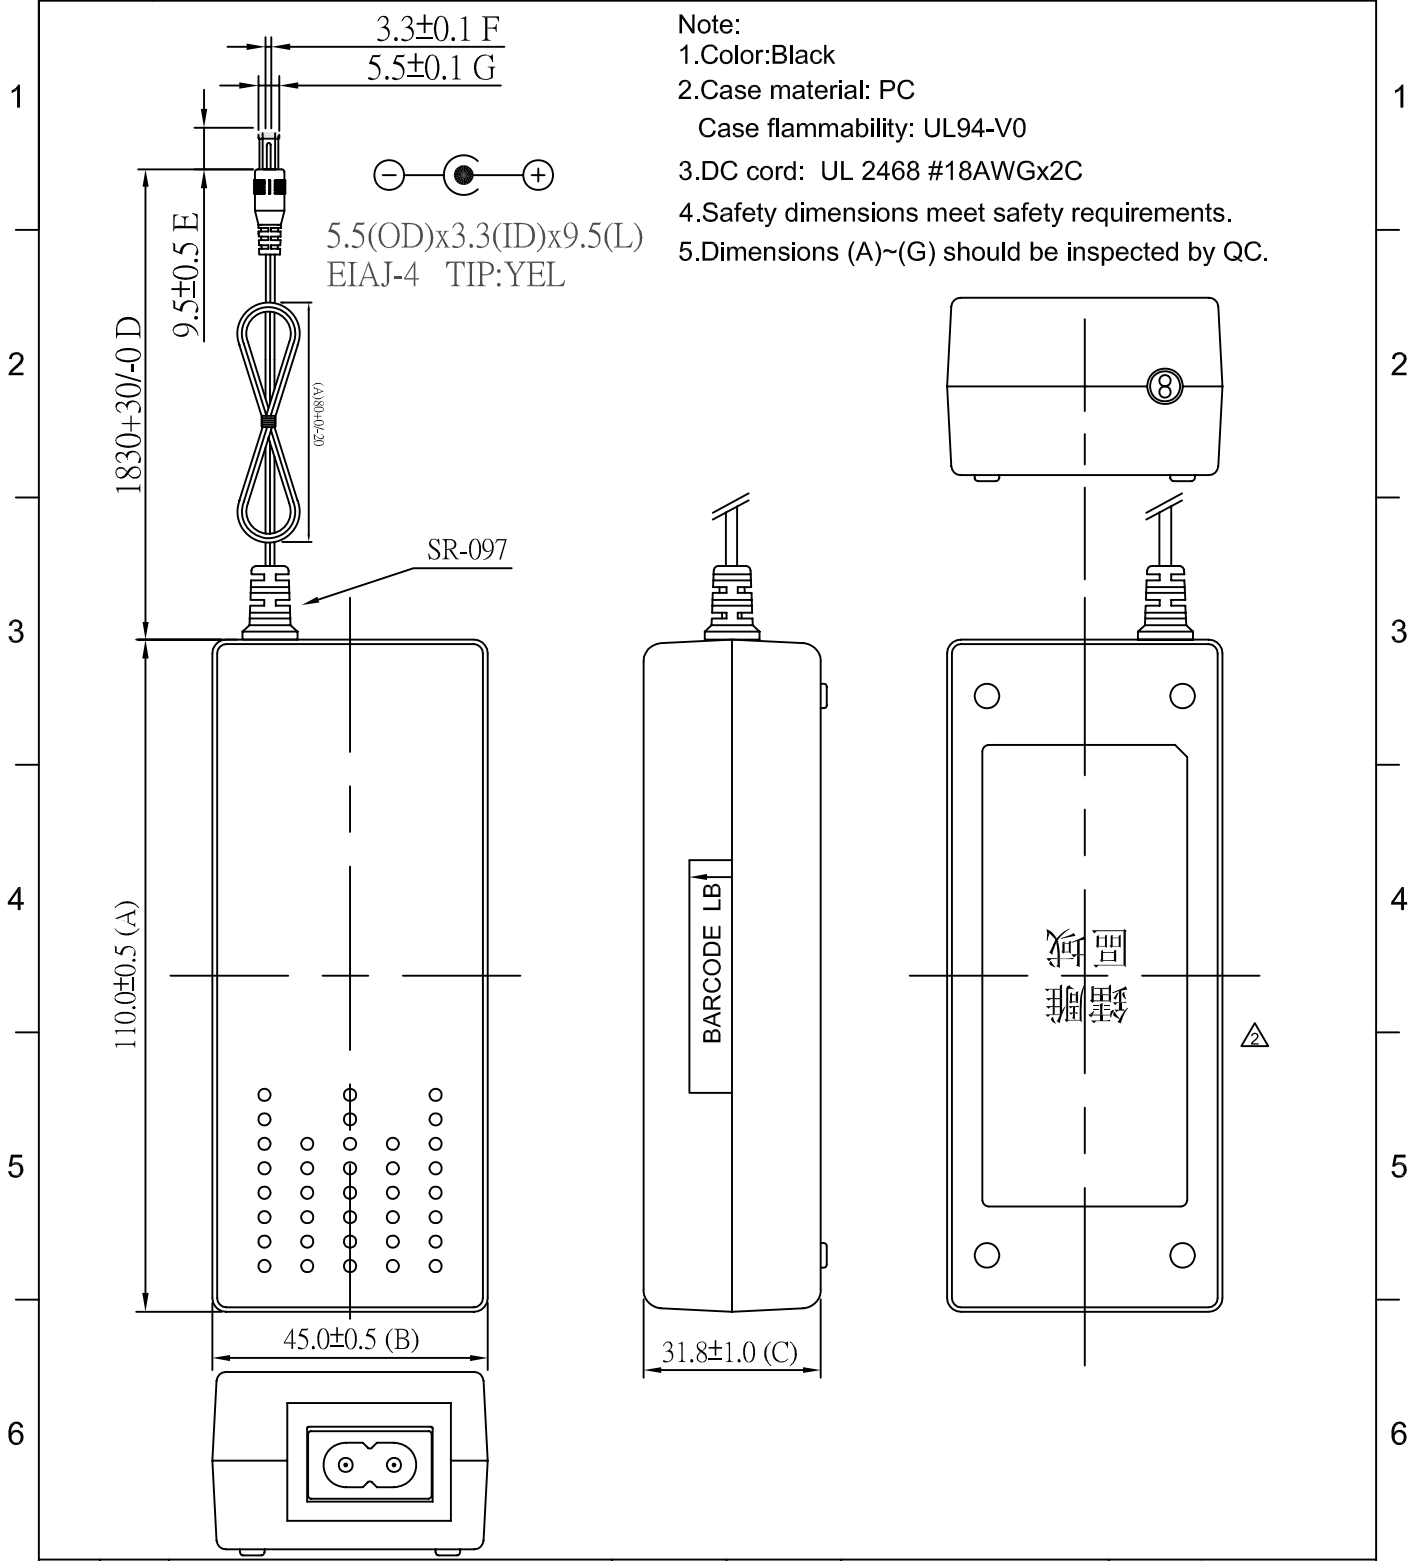

Note:  
 1.Color:Black  
 2.Case material: PC  
 Case flammability: UL94-V0  
 3.DC cord: UL 2468 #18AWGx2C  
 4.Safety dimensions meet safety requirements.  
 5.Dimensions (A)~(G) should be inspected by QC.

					UNIT	mm	
		由LABELVAREA 改為 鑄雕			SCALE		ISSUED DATE 2/DEC/14
		新發文圖面			DRAWN BY BECK ZOU		CHECKED BY DOOM.XIE
7	REV.	ZONE	DESCRIPTION	DATE	ECA NO.	DESIGNED BY JIE.HUANG	APPROVED BY ZQ.WANG

**SHOGYO** ITEM NO. : DRAWING NO. NU40-H1120-311S SHEET 1 OF 1