PART NUMBERING KEY:

SHO-MU05B2-050-100-Q

SHO: SHOGYO
MU05B2: Model Designation (5 Watt Series with USB Input Jack on Back End)
050: Indicates Output Voltage. (Available at 5VDC Only)
100: Indicates Output Current. (Available at 1.0A Only)
Q: Indicates Type of Input Prongs (1=United States, 2=European, 3=United Kingdom, 4=Australian)

- **SPECIAL OPTIONS AND CUSTOM DESIGNS AVAILABLE (PLEASE CONTACT SHOGYO DIRECTLY AT INFO@SHOGYO.COM)**

- **CONTACT SHOGYO DIRECTLY FOR COMPLETE SPECIFICATIONS**

File Name	F:\CAD\產品外觀圖\MU05\MU05B21050-AK0S

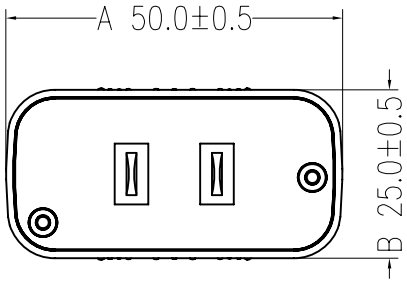

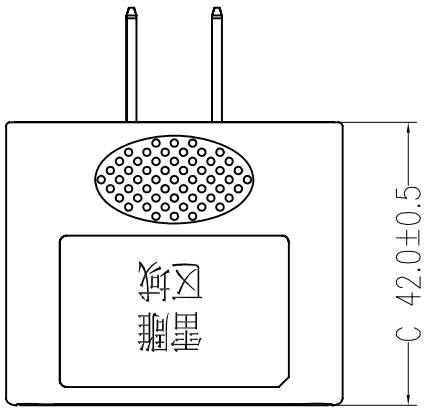

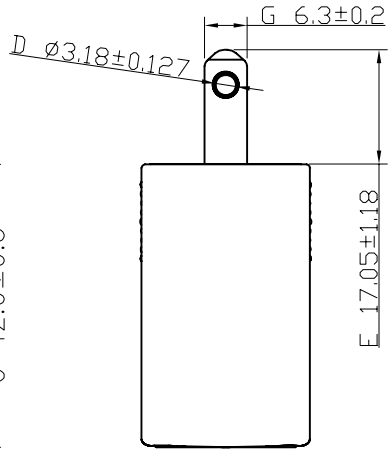

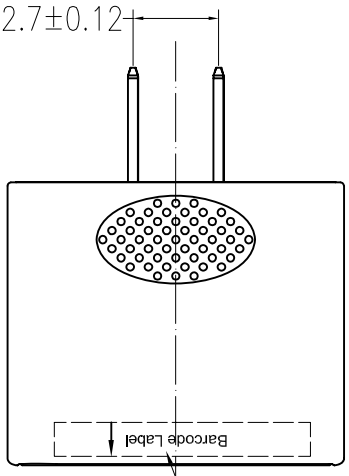

貼條碼位置



Note:

1.Color:Black

2.Case material: SE-100X

Case flammability: UL94-V1

3.USB:0505-BK000003 △2

Insert Force: 35N MAX

Extraction Force：10N min

Velocity:12.5mm（0.492） per minute

Hardiness:Extraction Force must 8N min After 1500 cycle

4.Safety dimensions meet safety requirements

5.Dimensions (A)~(G)should be inspected by QC. △3

REV	ZONE	DESCRIPTION	DATE	ECA NO.		
△4		LABEL 改为雷雕	2014.12.16		UNIT mm	
△3		修改尺寸检测字母	2013.08.28		SCALE	ISSUED DATE 01/MAR/'13
△2		增加USB標準	2013.06.24	ECA-230173	DRAWN BY Z.H	CHECKED BY DOOM.XIE
					DESIGNED BY FEIFEI ZHAO	APPROVED BY ZQ.WANG

SHOGYO

TEM NO. :	DRAWING NO.	SHEET
OUTLINE DRAWING	MU05B21050-AK0S	1 OF 1

File Name G:\CAD\外觀圖\MU05\MU05B21050-KK0S

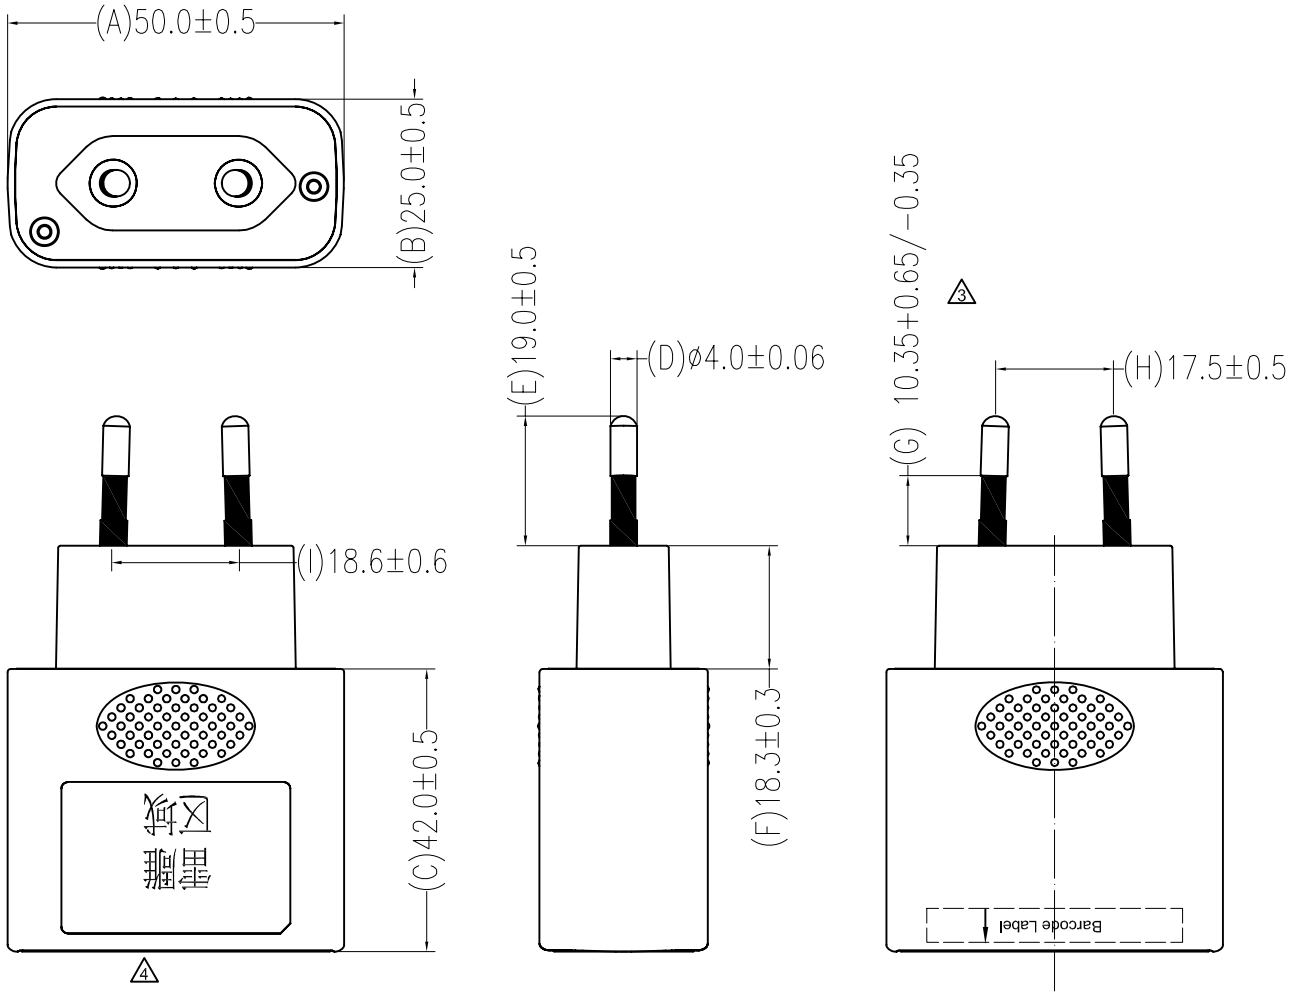



Note:

1.Color:Black

2.Case material: SE-100X

Case flammability: UL94-V1

3.USB:0505-BK000003 △2

Insert Force: 35N MAX

Extraction Force：10N min

Velocity:12.5mm（0.492） per minute

Hardiness:Extraction Force must 8N min After 1500 cycle

4.Safety dimensions meet safety requirements

5.Dimensions (A)~(I)should be inspected by QC.

PEV	ZONE	DESCRIPTION	DATE	ECA NO.		
△4		LABEL 改为雷雕	2014.12.16		UNIT mm	
△3		修改PIN腳安規尺寸	2014.03.20	ECA-351952	SCALE	ISSUED DATE 01/MAR/'13
△2		增加USB標準	2013.06.24	ECA-226752	DRAWN BY Z.H	CHECKED BY DOOM.XIE
					DESIGNED BY FEIFEI ZHAO	APPROVED BY ZQ.WANG

SHOGYO

TEM NO. : OUTLINE DRAWING

DRAWING NO. MU05B21050-KK0S

SHEET 1 OF 1

File Name	G:\CAD\外觀圖\MU05\MU05B21050-IK0S

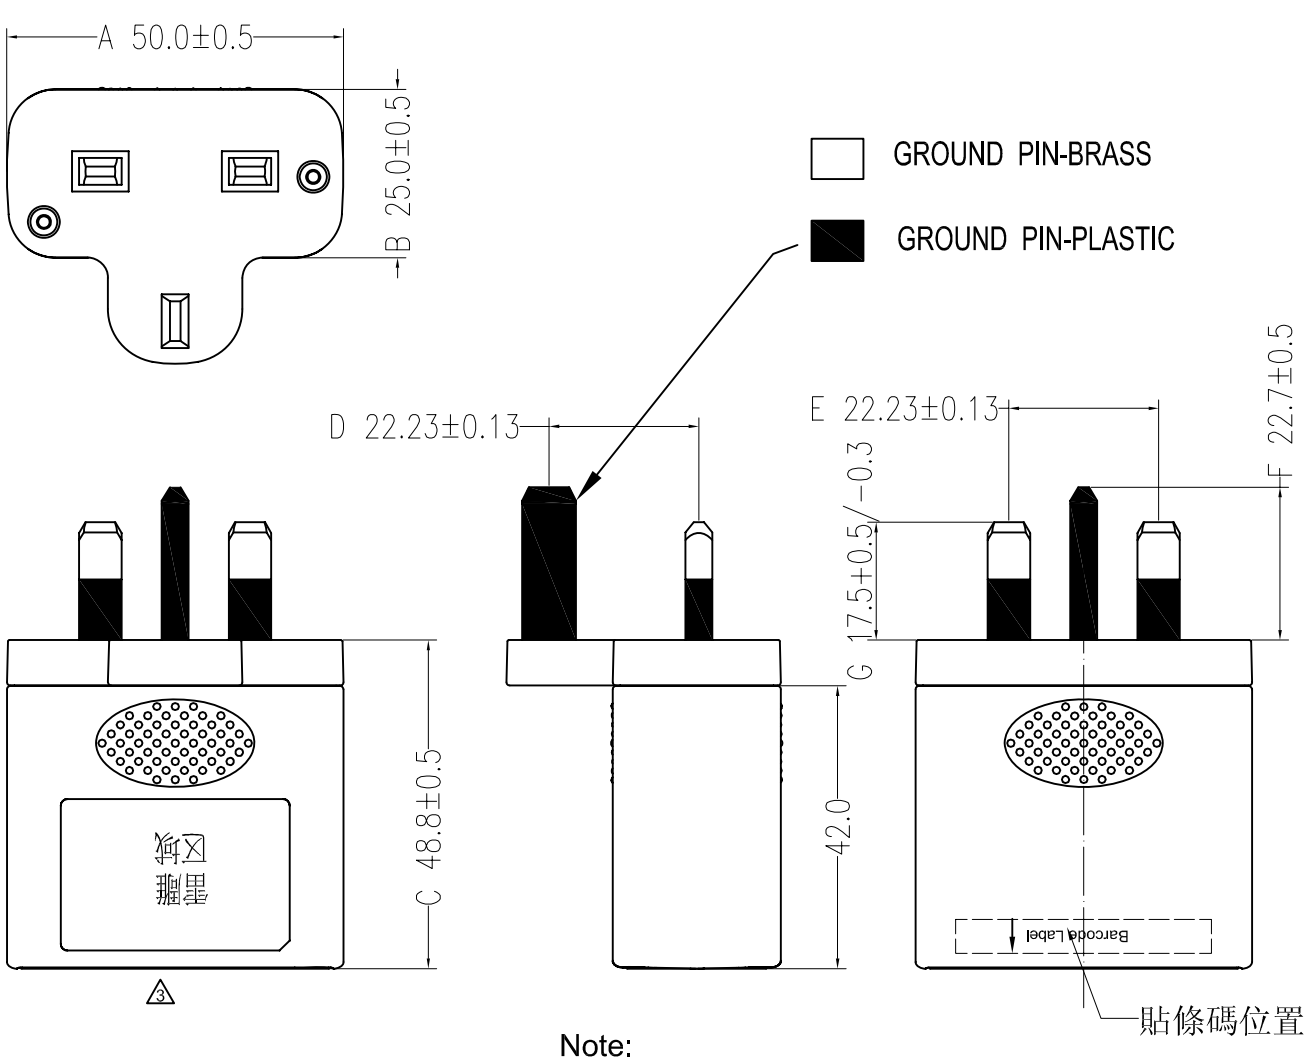

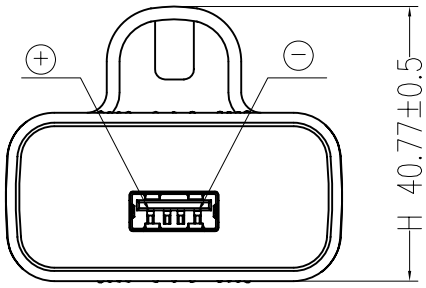

Note:
1.Color:Black
2.Case material: SE-100X
Case flammability: UL94-V1
3.USB:0505-BK000003
Insert Force: 35N MAX
Extraction Force：10N min
Velocity:12.5mm（0.492） per minute
Hardiness:Extraction Force must
8N min After 1500 cycle
4.Safety dimensions meet safety requirements
5.Dimensions (A)~(I)should be inspected by QC.

REV.	ZONE	DESCRIPTION	DATE	ECA NO.		
3		LABEL 改为雷雕	2014.12.16		UNIT mm	
2		增加USB標準	2013.06.24	ECA-226852	SCALE	ISSUED DATE 01/MAR/'13
1		新出圖面			DRAWN BY Z.H	CHECKED BY DOOM.XIE
					DESIGNED BY FEIFEI ZHAO	APPROVED BY ZQ.WANG

SHOGYO

ITEM NO. :	DRAWING NO.	SHEET
OUTLINE DRAWING	MU05B21050-IK0S	1 OF 1