





**SPECIFICATIONS**

CIRCUIT: SPST  
 CONTACT RATING: 10mA  
 VOLTAGE RATING: 12VDC  
 DIELECTRIC WITH STANDING VOLTAGE: 250VAC for 1 minute  
 CONTACT RESISTANCE: 500Ω max.(initial)  
 INSULATION RESISTANCE: 100MΩ min.  
 OPERATION LIFE: 100,000 cycles  
 SOLDERING SPECIFICATION: 260°C for 3 seconds

**CONDUCTIVE RUBBER CONTACT**

INDEX  
 TOGGLE  
 ROCKER  
 SLIDE  
 PUSH BUTTON  
 DIP  
 TACT

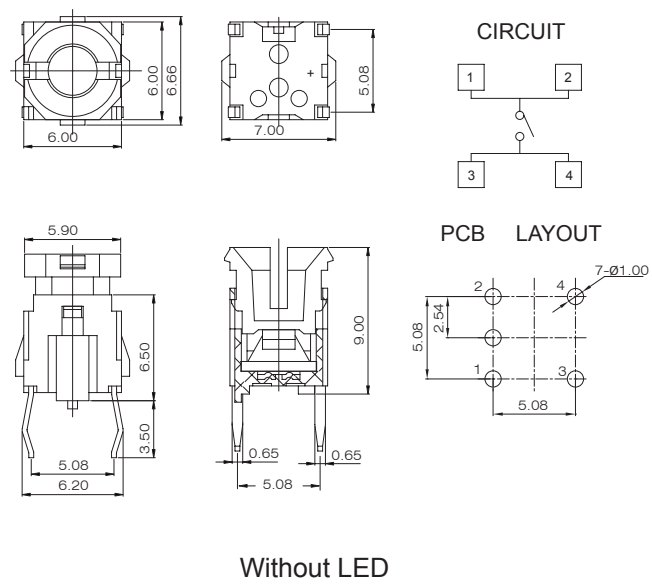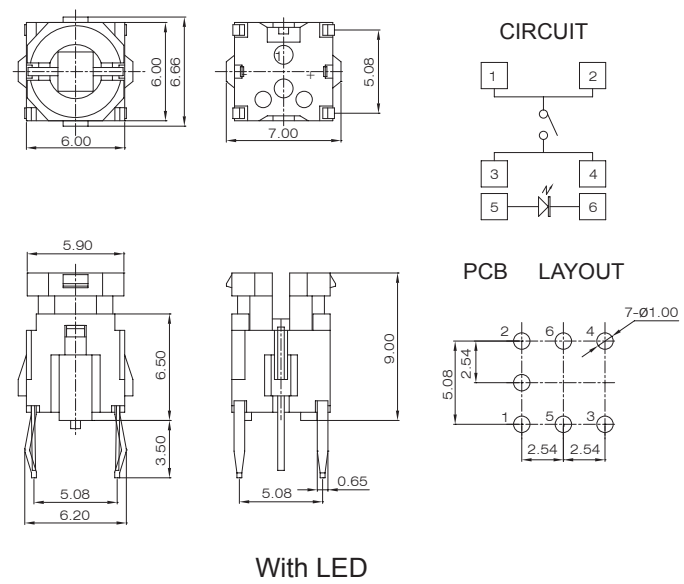

**HOW TO ORDER**

