
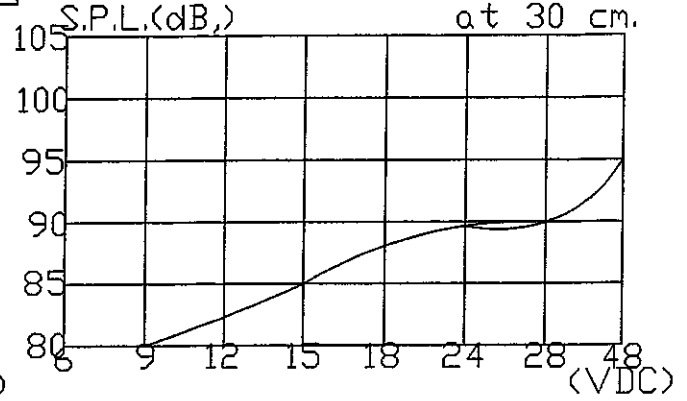


\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)  
VOLUME CONTROL RANGE: 1 - 10 dB.

Knurled Nut  
(NON-UL)  
at 30 cm.

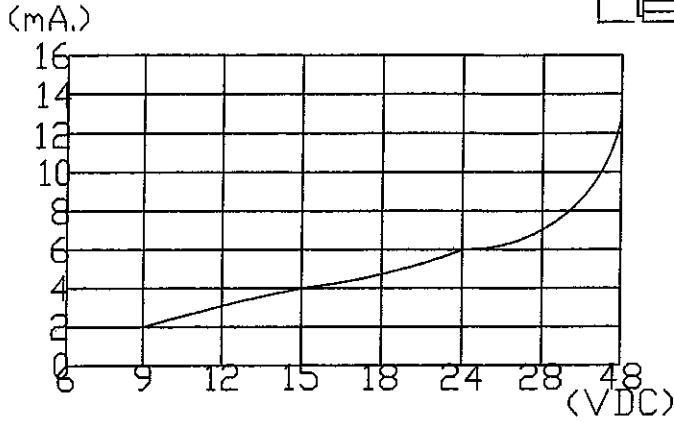

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC)	6~48
Current Consumption at 12VDC (mA.maximum)	3
Sound Pressure Level at 30cm/12VDC(dB.minimum)	80
Tone	Continuous
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	35

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		SU2948S(RoHS)
UNIT: mm.		MATERIAL ABS UL-94 1/16" HB
EDITION: 1		
SHEET 1 OF 1		

# SHOGYO

**SHOGYO INTERNATIONAL CORP.**  
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
TEL: (516) 921-9111 • FAX: (516) 921-3777  
www.shogyo.com