
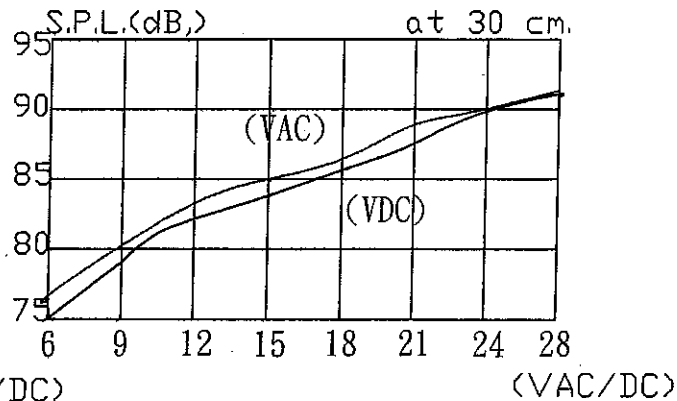


\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)  
 VOLUME CONTROL RANGE: 1 - 10 dB.  
 (NON-UL)

Unit: mm.  
 Tolerance: ±0.5mm.

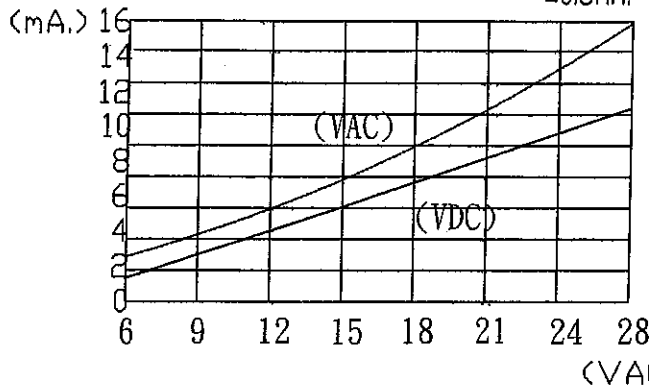

|                               |                   |
|-------------------------------|-------------------|
| □ Oscillating Frequency (Hz)  | 2900±500Hz.       |
| □ Operating Voltage (VDC/VAC) | 6 - 28V.          |
| Tone                          | Fast Pulse (3Hz.) |
| □ Operating Temperature (°)   | -20~+60           |
| Storage Temperature (°)       | -30~+70           |
| Weight (Gram)                 | 33.8              |

|                       |  |                    |
|-----------------------|--|--------------------|
| PIEZO AUDIO INDICATOR |  | PART NO.           |
| DRAWN 2012/6/1        |  | SU2951AN (ROHS)    |
| UNIT: mm.             |  |                    |
| EDITION: 1            |  | MATERIAL           |
| SHEET 1 OF 1          |  | ABS UL-94 1/16" HB |



**SHOGYO INTERNATIONAL CORP.**  
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
 TEL: (516) 921-9111 • FAX: (516) 921-3777  
 www.shogyo.com