



VOLUME CONTROL RANGE: 1 - 10 dB.

\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)

(mA.)

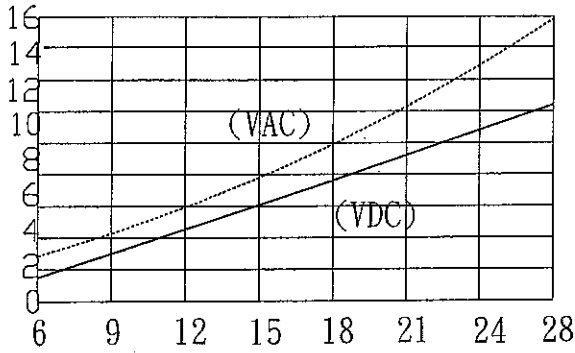

(NON-UL)

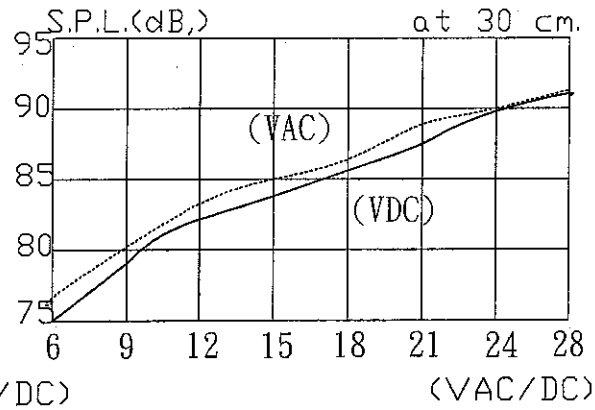

Oscillating Frequency (Hz)	2900±500Hz.
Operating Voltage (VDC/VAC)	6 - 28V.
Tone	Fast Pulse (3Hz.)
Operating Temperature (°)	-20~+60
Storage Temperature (°)	-30~+70
Weight (Gram)	33.8

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		SU2951SAN (RoHS)
UNIT: mm.		MATERIAL
EDITION: 1		ABS UL-94 1/16" HB
SHEET 1 OF 1		



**SHOGYO INTERNATIONAL CORP.**  
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
 TEL: (516) 921-9111 • FAX: (516) 921-3777  
 www.shogyo.com