



VOLUME CONTROL RANGE: 1 - 10 dB.
 ***Panel mounting (fits 1 1/8" dia. panel openings up to 1/4" thick) (NON-UL)

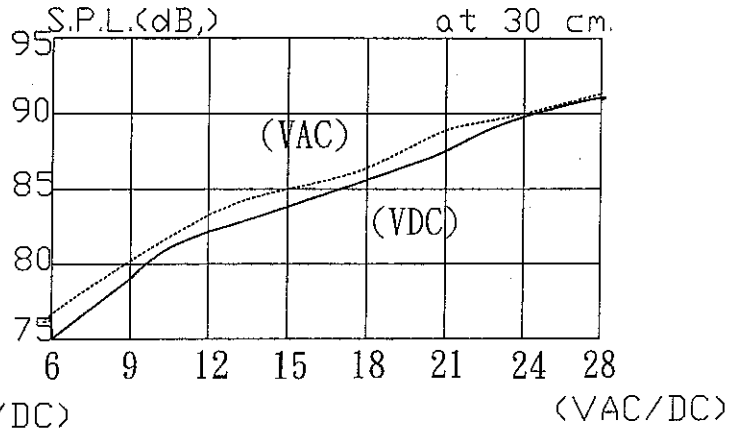

Oscillating Frequency(Hz)	2900±500Hz.
Operating Voltage(VDC/VAC)	6 - 28V.
Tone	Slow Pulse(1.2Hz.)
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-30~+70
Weight (Gram)	33.8

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		SU2953AN(RoHS)
UNIT: mm.		MATERIAL
EDITION: 1		ABS UL-94 1/16" HB
SHEET 1 OF 1		

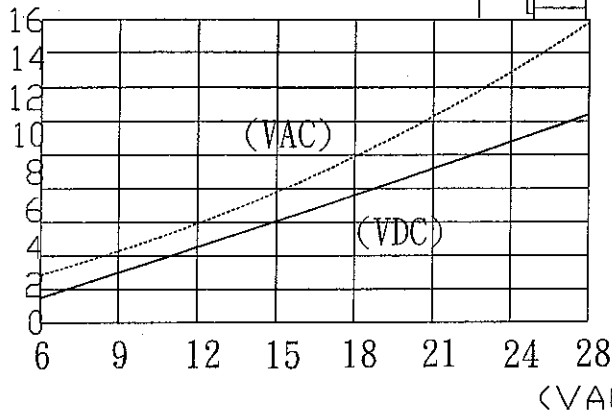

SHOGYO INTERNATIONAL CORP.
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
 TEL: (516) 921-9111 • FAX: (516) 921-3777
 www.shogyo.com