




Unit:mm.

Tolerance:
±0.5mm.

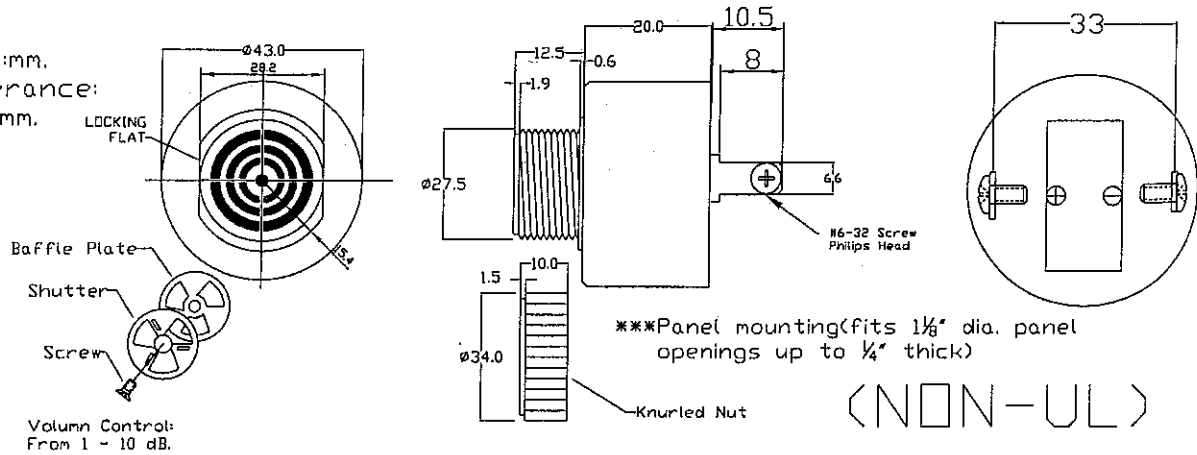

Volume Control:
From 1 - 10 dB.

(NON-UL)

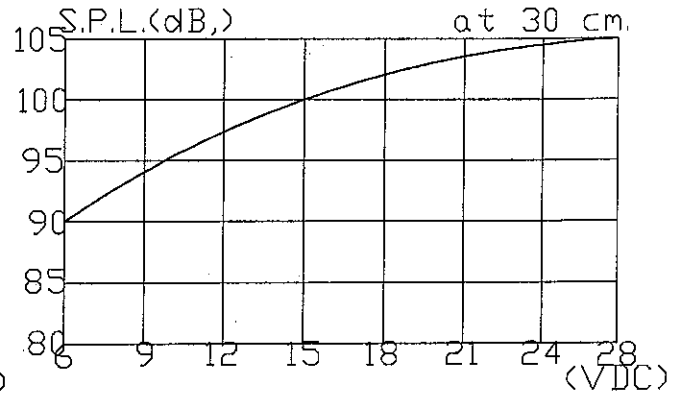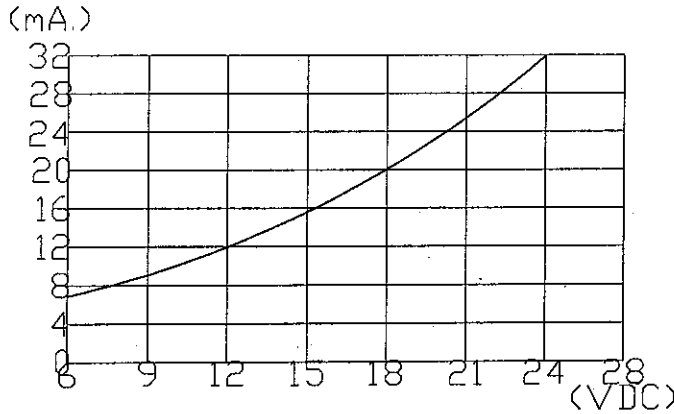

| | |
|---|--------------------|
| Oscillating Frequency(Hz) | 2900±500Hz. |
| Operating Voltage(VDC) | 6~28 |
| Current Consumption at 12VDC (mA.maximum) | 12 |
| Sound Pressure Level at 30cm/12VDC(dB.minimum) | 92 |
| Tone | Slow Pulse(1.2Hz.) |
| Operating Temperature(°) | -20~+60 |
| Storage Temperature(°) | -30~+70 |
| Weight (Gram) | 36 |

| | | |
|-----------------------|--|--------------------|
| PIEZO AUDIO INDICATOR | | PART NO. |
| DRAWN 2009/2/1 | | SU2953SA(ROHS) |
| UNIT: mm. | | MATERIAL |
| EDITION: 1 | | ABS UL-94 1/16" HB |
| SHEET 1 OF 1 | | |

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com