
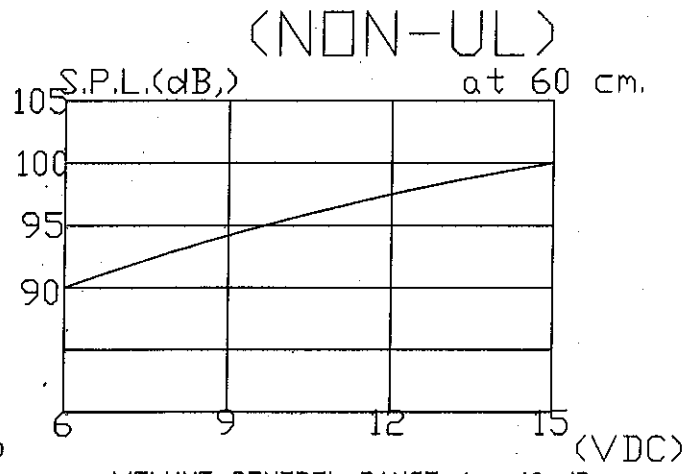


\*\*\*Panel mounting (fits 1/8" dia. panel openings up to 1/4" thick)

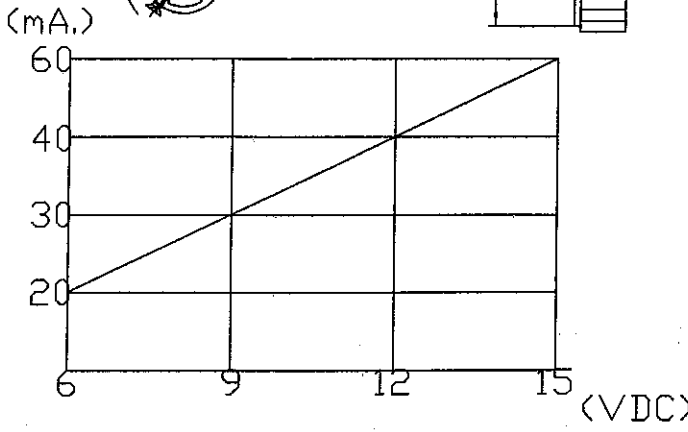

\*\*\*VOLUME CONTROL RANGE: 1 - 10 dB.

Oscillating Frequency(Hz)	2.2 - 3.0Khz.
Operating Voltage(VDC)	6 - 15
Tone	Hi - Low
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-20~+70
Weight (Gram)	68

PIEZO AUDIO INDICATOR		PART NO.
DRAWN	2012/6/1	SU2980S(RoHS)
UNIT:	mm.	
EDITION:	1	MATERIAL
SHEET	1 OF 1	ABS UL-94 1/16" HB



**SHOGYO INTERNATIONAL CORP.**  
 6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791  
 TEL: (516) 921-9111 • FAX: (516) 921-3777  
 www.shogyo.com