

# FEATURE

1. Sealed construction
2. Ultraminiature size
3. High temperature materials (UL 94V-0)

## SPECIFICATIONS

CONTACT RATING: max 0.4 VA max @ 28 VDC  
Min . 1  $\mu$  A /20 mVDC


ELECTRICAL LIFE: 10,000 make-and-break cycles at full load

CONTACT RESISTANCE: 100 m $\Omega$  max. initial @2-4 VDC, 100 mA

INSULATION RESISTANCE: 500 M $\Omega$  min.

DIELECTRIC STRENGTH: 250 VAC, 50 Hz for the duration of 1 minute.

OPERATING TEMPERATURE: -30°C to +85°C



## MATERIALS

CASE - nylon 4/6

ACTUATOR - nylon

FRAME - nylon 4/6

TERMINAL - bronze, gold-plated or tin plated

CONTACT - phosphor bronze, silver plated


LOOP SEALING - rubber

## How do you modify the switches you need!!

U T - 4 - T 2 C K - 2 - - -



Switches Function		Actuator	Termination	Contact Material	Actuator color	Case color
UT-4	SP on-none-on	T2 3.80	C PC (straight type)	K (std) gold / tin plated	1 white	□ : white (std.)
UT-4A	SP on-off-on		S PC (snap-in type)	R gold plated	2 black	2 : black
UT-5	DP on-none-on		H horizon			
UT-5A	DP on-off-on		V vertical			
			M SMT			
			MI SMT			
						RoHS code
						H = RoHS Compliant

C




PC (STRAIGHT TYPE)



Model No.	Switching position		
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1




UT-4-T2CK-2




Model No.	Switching position		
UT-5	ON	none	ON
UT-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4

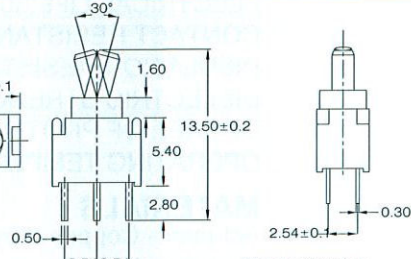

UT-5-T2CK-2





H




HORIZON RIGHT ANGLE



Model No.	Switching position		
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1

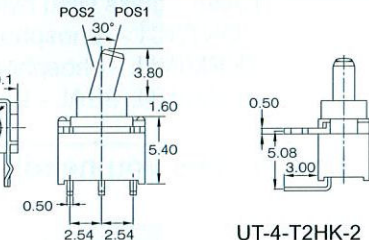


UT-4-T2HK-2



Model No.	Switching position		
UT-5	ON	none	ON
UT-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4

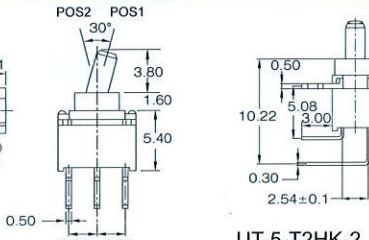

UT-5-T2HK-2





V




VERTICAL RIGHT ANGLE



Model No.	Switching position		
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1

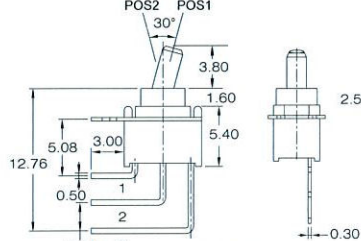


UT-4-T2VK-2




Model No.	Switching position		
UT-5	ON	none	ON
UT-5A	ON	OFF	ON
Term. Comm.	2-3,5-6	open	2-1,5-4

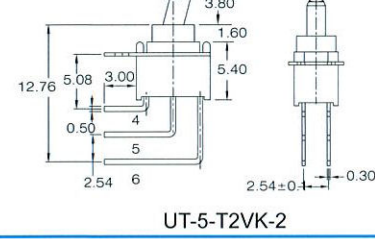

UT-5-T2VK-2





SMT TYPE



SMT TYPE

Model No.	Switching position		
UT-4	ON	none	ON
UT-4A	ON	OFF	ON
Term. Comm.	2-3	open	2-1

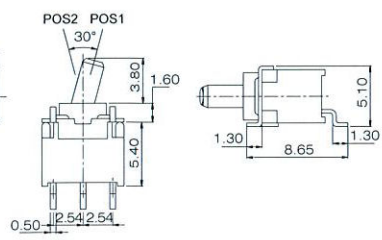

UT-4-T2MK-2

