




# SHOGYO INTERNATIONAL CORP.

www.shogyo.com

## SPEAKER SPECIFICATIONS

MODEL NO.	GA0576X (RoHS)				
1	NOMINAL SIZE	57 mm	2-1/4 inch		
2	IMPEDANCE	8 $\Omega$ $\pm$ 15%	at. 800 Hz	1 V	
3	RESONANCE FO	400 Hz $\pm$ 80 Hz	FO Hz	1 V	
4	S.P. LEVEL	88 dB/w $\pm$ 3 dB	1 W 50 cm average at		
5	FREQ. RESPONSE	Fo Hz ~ 4K Hz	MAX 10 dB	800, 1K, 1.2K, 1.5K Hz	
6	INPUT POWER	Nominal Input 0.25 W	Handling Capacity 0.5 W		
7	OPERATION	Must be normal at program source 0.25 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 1.41 V			
9	MAGNET	13 x 10 mm			
10	FLUX DENSITY	Gauss $\pm$ 10%	total flux max well within		
11	TOTAL WEIGHT	gr	oz		
12	LOAD TEST	After test meets Item 7 and 8	White noise 0.25 W 5 Hours		
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	70 $\pm$ 2 $^{\circ}$ C 20-50 % R.H. 5 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm$ 2 $^{\circ}$ C 90-95 % R.H. 5 Hours		

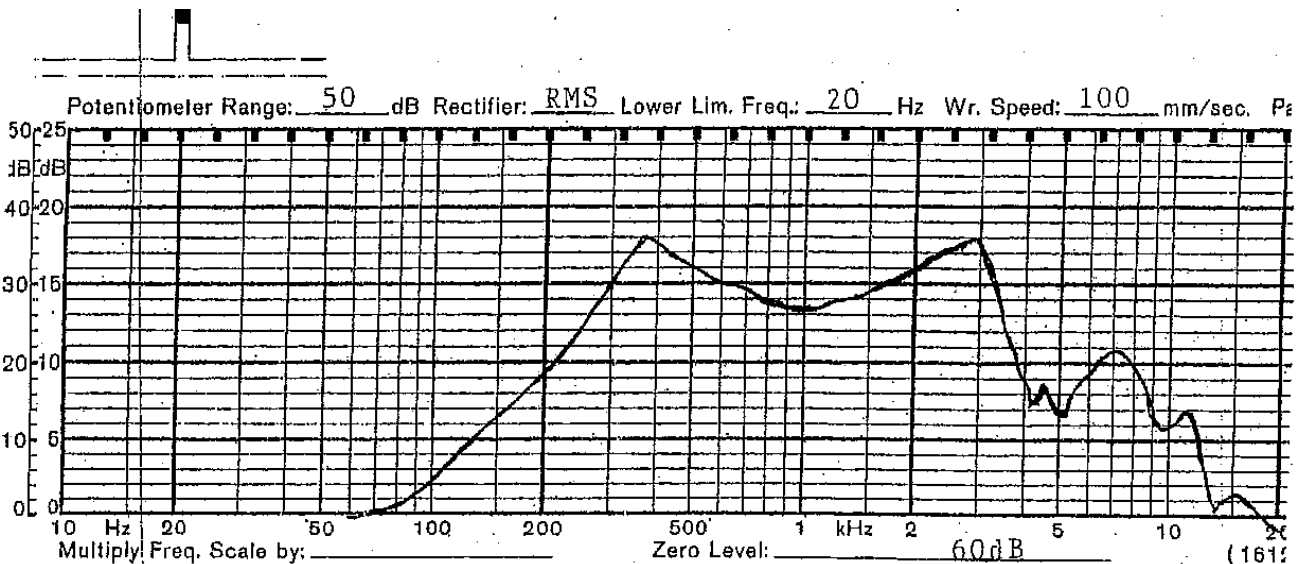

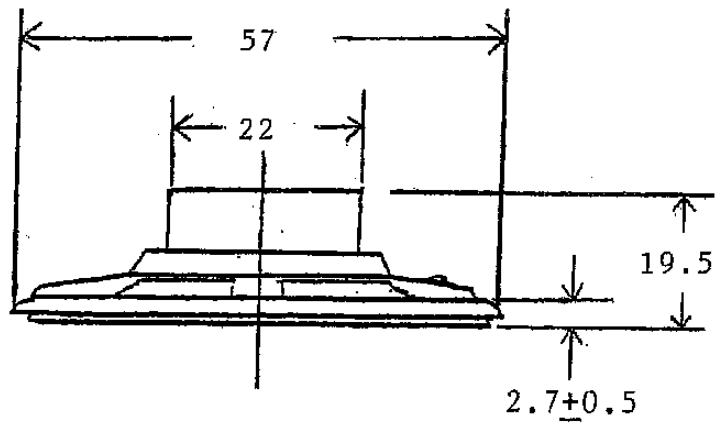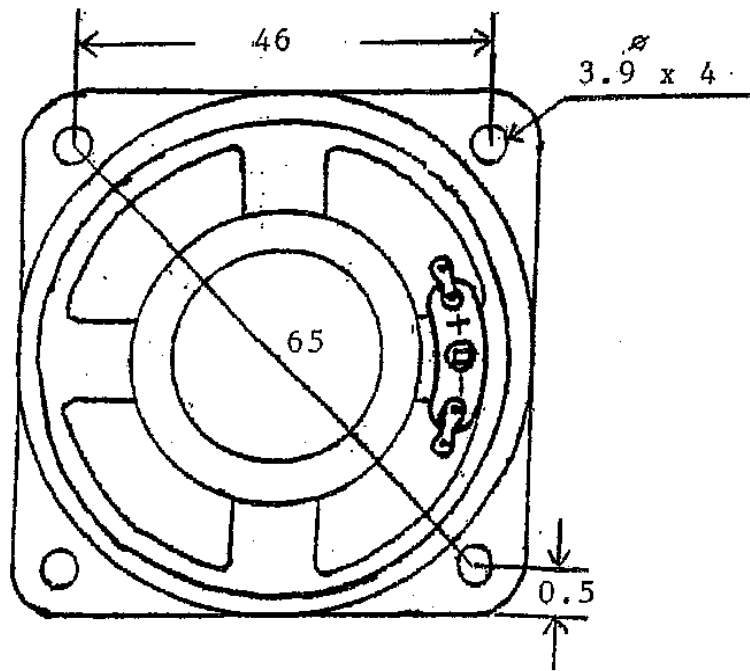

**MODEL NO. GA0576X**

APPROVED	CHECKED	DRAWING