




# SHOGYO INTERNATIONAL CORP.

www.shogyo.com

## SPEAKER SPECIFICATIONS

<b>MODEL NO.</b>	<b>GA0771MX (RoHS)</b>					
<b>1</b>	<b>NOMINAL SIZE</b>	<b>77 mm</b>	<b>3 inch</b>			
<b>2</b>	<b>IMPEDANCE</b>	<b>4 Ω ± 15%</b>	<b>at. 800 Hz</b>	<b>1 V</b>		
<b>3</b>	<b>RESONANCE FO</b>	<b>320 Hz ± 64 Hz</b>	<b>FO Hz</b>	<b>1 V</b>		
<b>4</b>	<b>S.P. LEVEL</b>	<b>90 dB/w ± 3 dB</b>	<b>1 W 50 cm average at</b>			
<b>5</b>	<b>FREQ. RESPONSE</b>	<b>Fo Hz ~ 7K Hz</b>	<b>MAX 10 dB</b>	<b>1K, 1.5K, 1.7K, 2K Hz</b>		
<b>6</b>	<b>INPUT POWER</b>	<b>Nominal Input 1 W</b>	<b>Handling Capacity 2 W</b>			
<b>7</b>	<b>OPERATION</b>	<b>Must be normal at program source 1 W</b>				
<b>8</b>	<b>BUZZ, RATTLE, ETC.</b>	<b>Must be normal at Sine Wave 2 V</b>				
<b>9</b>	<b>MAGNET</b>	<b>13 x 10 mm</b>				
<b>10</b>	<b>FLUX DENSITY</b>	<b>Gauss ± 10%</b>	<b>total flux max well within</b>			
<b>11</b>	<b>TOTAL WEIGHT</b>	<b>gr</b>	<b>oz</b>			
<b>12</b>	<b>LOAD TEST</b>	<b>After test meets Item 7 and 8</b>	<b>White noise 1 W 24 Hours</b>			
<b>13</b>	<b>DISTORTION</b>					
<b>14</b>	<b>HEAT TEST</b>	<b>After test meets Item 7 and 8</b>	<b>60 ± 2° C 20-50 % R.H. 24 Hours</b>			
<b>15</b>	<b>HUMIDITY TEST</b>	<b>After test meet Item 7 and 8</b>	<b>40 ± 2° C 90-95 % R.H. 24 Hours</b>			

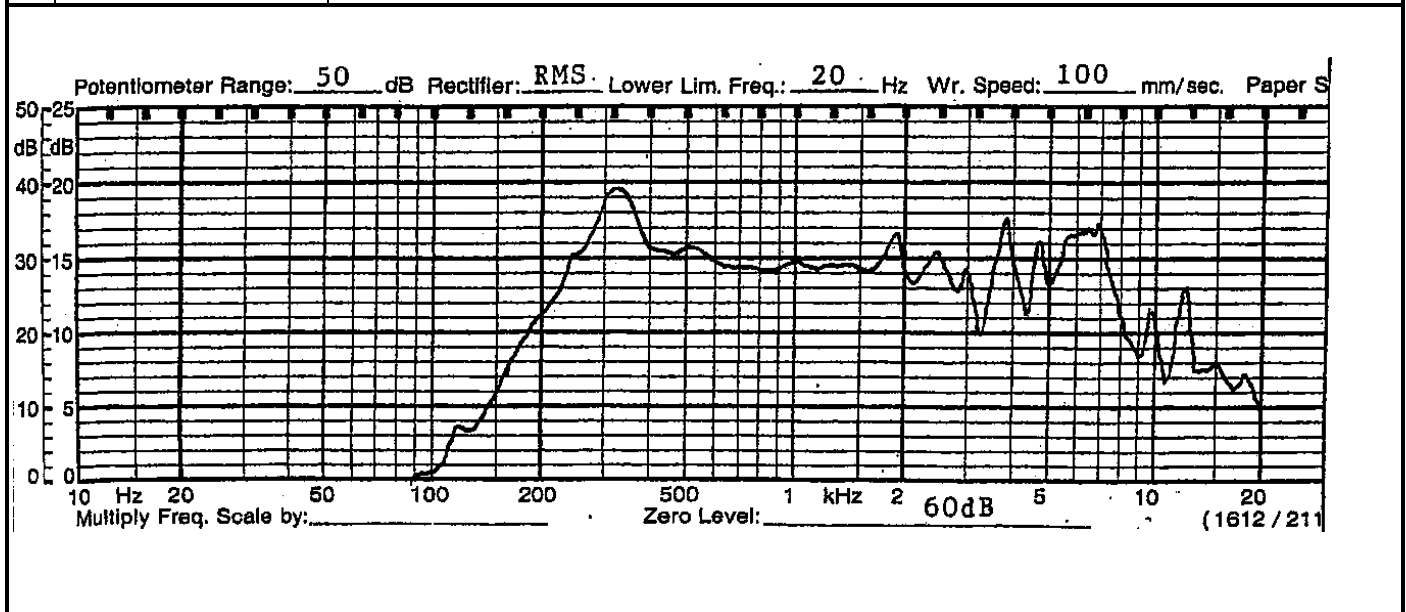

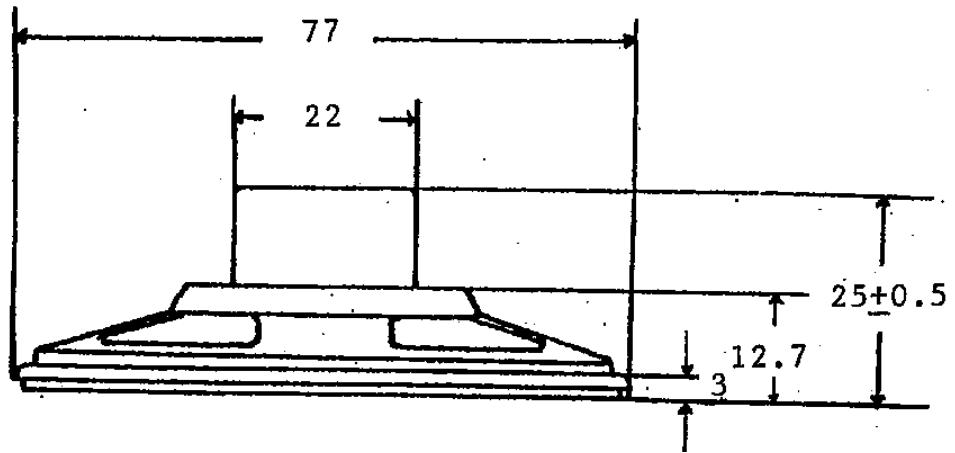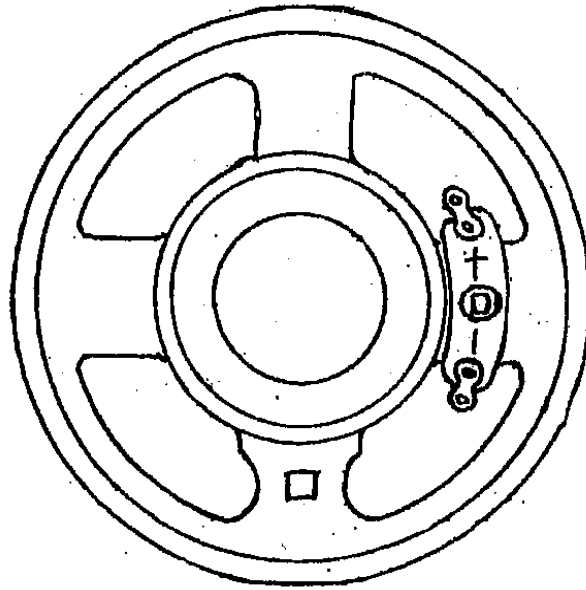

TOLERANCE: ± 0.5 MM

MODEL NO. GA0771MX

APPROVED	CHECKED	DRAWING