




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0302MX (RoHS)					
1	NOMINAL SIZE	30 mm	1 inch			
2	IMPEDANCE	32 Ω ± 15%	at. 1K Hz	1 V		
3	RESONANCE FO	220 Hz ± 44 Hz	FO Hz	1 V		
4	S.P. LEVEL	120 dB/w ± 3 dB	0.001 W 1 cm average			
5	FREQ. RESPONSE	Fo Hz ~ 3K Hz	MAX 10 dB	at 800, 1K, 1.2K, 1.5K Hz		
6	INPUT POWER	Nominal Input 0.03 W	Handling Capacity 0.15 W			
7	OPERATION	Must be normal at program source 0.03 W				
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 0.98 V				
9	MAGNET	12.5 x 1.5 mm				
10	FLUX DENSITY	Gauss ± 10%	total flux max well within			
11	TOTAL WEIGHT		gr	oz		
12	LOAD TEST	After test meets Item 7 and 8	White noise 0.03 W 5 Hours			
13	DISTORTION					
14	HEAT TEST	After test meets Item 7 and 8	65 ± 2° C 20-50 % R.H. 5 Hours			
15	HUMIDITY TEST	After test meet Item 7 and 8	40 ± 2° C 90-95 % R.H. 5 Hours			

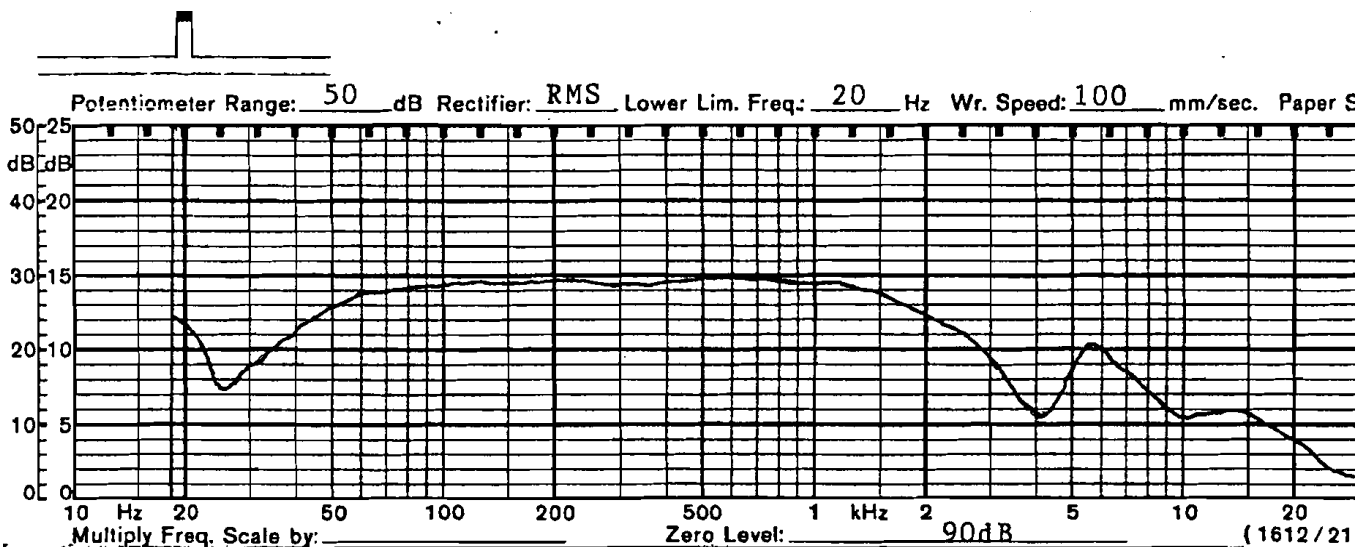

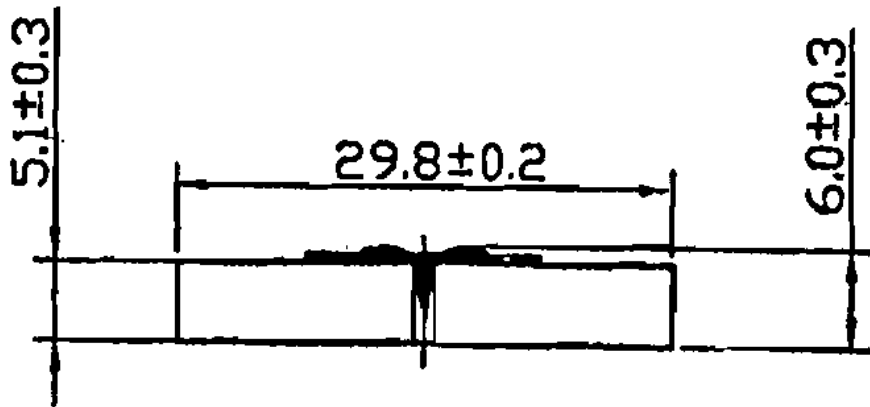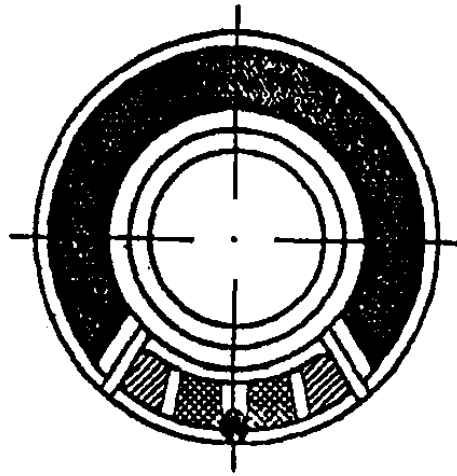

MODEL NO. GC0302MX

APPROVED	CHECKED	DRAWING