




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0326MX (RoHS)				
1	NOMINAL SIZE	32 x 32 mm	inch		
2	IMPEDANCE	8 Ω ± 15%	at. 2K Hz	1 V	
3	RESONANCE FO	900 Hz ± 180 Hz	FO Hz	1 V	
4	S.P. LEVEL	80 dB/w ± 3 dB	0.2 W 50 cm average at		
5	FREQ. RESPONSE	Fo Hz ~ 7K Hz	MAX 10 dB	1.2K, 1.5K, 2K, 2.5K Hz	
6	INPUT POWER	Nominal Input 0.2 W	Handling Capacity 0.4 W		
7	OPERATION	Must be normal at program source 0.2 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 1.3 V			
9	MAGNET	9.5 x 1.5 mm			
10	FLUX DENSITY	Gauss ± 10%	total flux max well within		
11	TOTAL WEIGHT	gr	oz		
12	LOAD TEST	After test meets Item 7 and 8	White noise 0.2 W 24 Hours		
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	65 ± 2° C 20-50 % R.H. 24 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 ± 2° C 90-95 % R.H. 24 Hours		

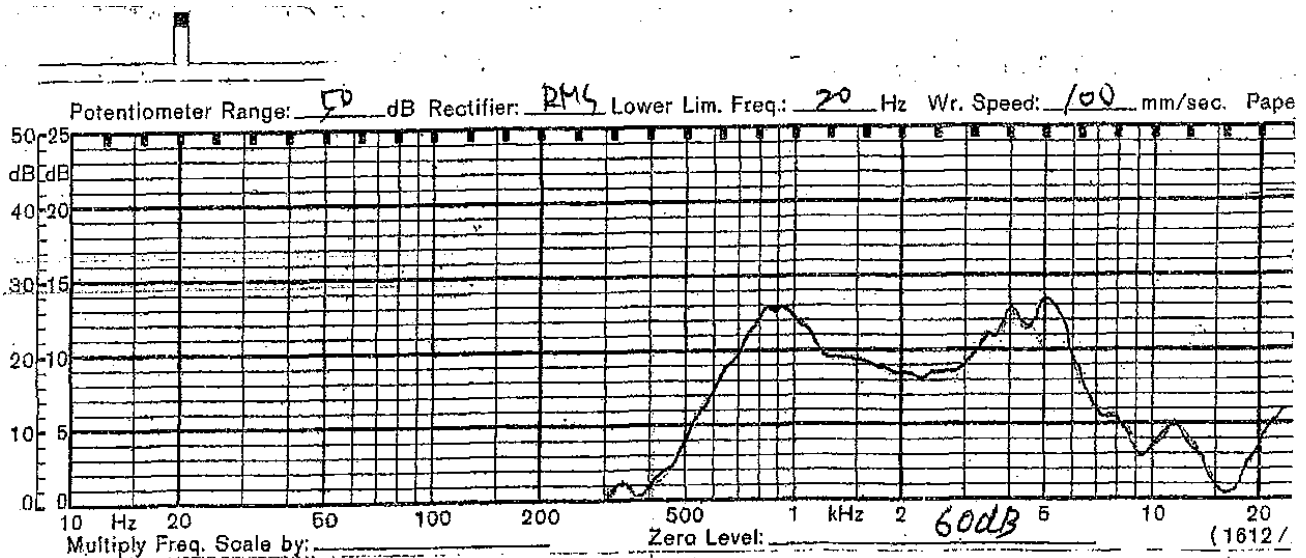

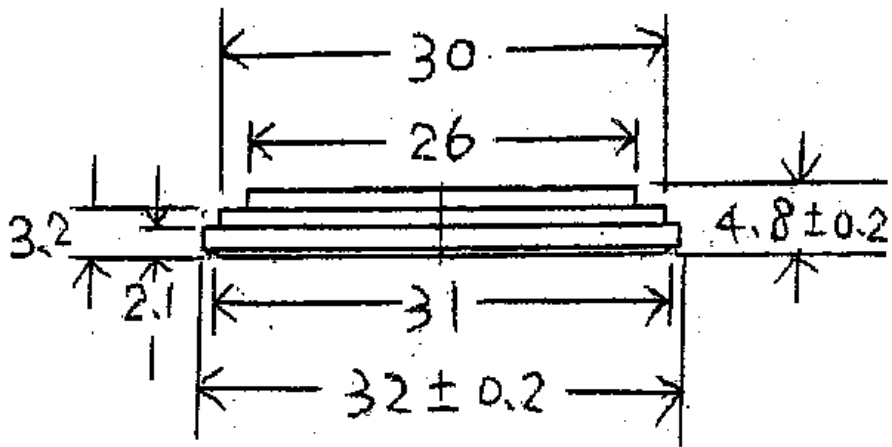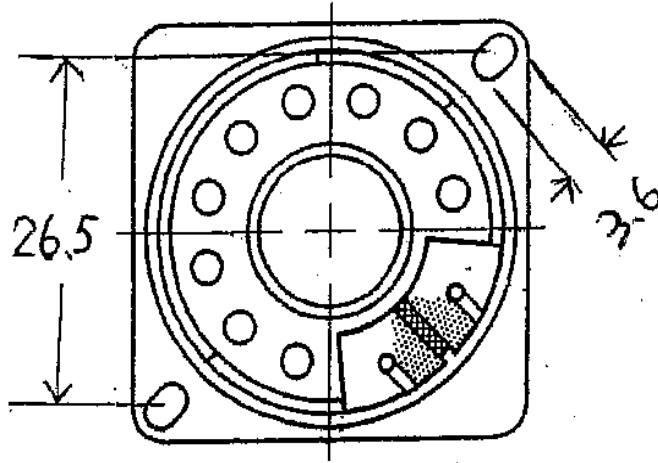

MODEL NO. GC0326MX

APPROVED	CHECKED	DRAWING