




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF0661MX (RoHS)				
1	NOMINAL SIZE	66 mm	2-1/2 inch		
2	IMPEDANCE	8 $\Omega \pm 15\%$	at. 800 Hz	1 V	
3	RESONANCE FO	430 Hz ± 86 Hz	FO Hz	1 V	
4	OUTPUT S.P.L.	88 dB ± 3 dB	0.5 W 50 cm average at 1K, 1.4K, 1.7K, 2K Hz		
5	FREQ. RESPONSE	Fo Hz ~10K Hz			
6	INPUT POWER	Rated power 0.5 W	Max power 1 W		
7	OPERATION	Must be normal at program source 0.5 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2 V			
9	MAGNET	32 x 18 x 6 mm			
10	FLUX DENSITY	Gauss $\pm 10\%$ total flux max well within			
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise 0.5 W	24 Hours	
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	60 $\pm 2^\circ$ C	20-50 % R.H.	24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 $\pm 2^\circ$ C	90-95 % R.H.	24 Hours

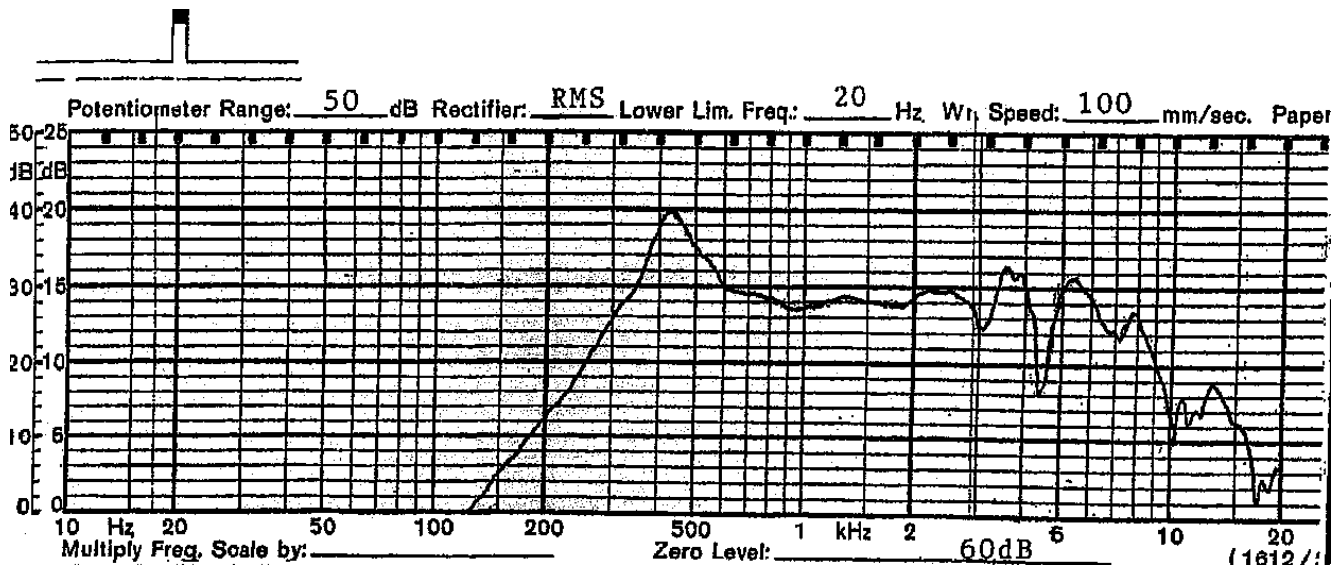

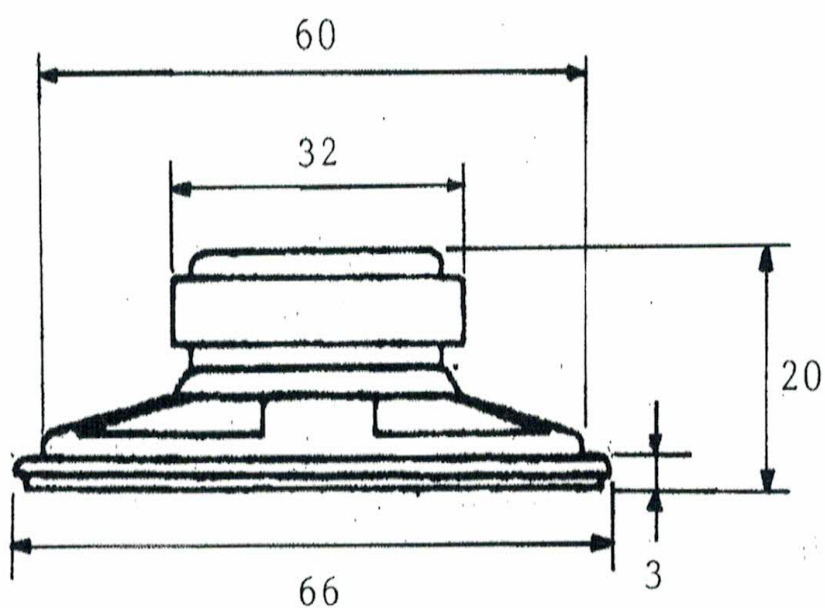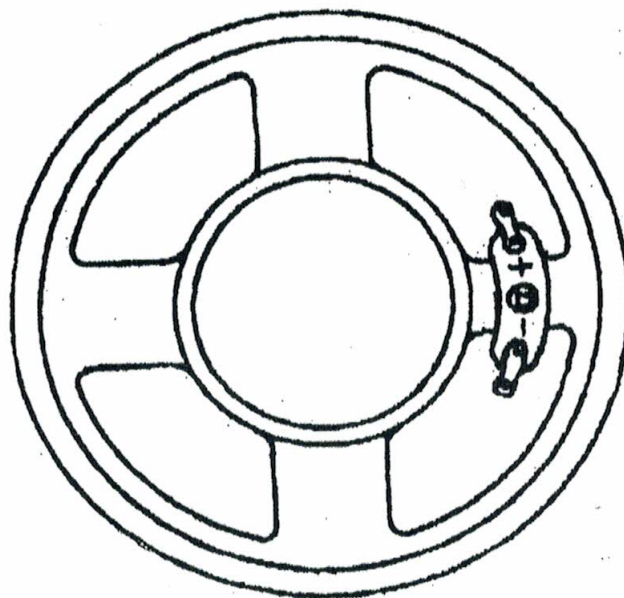

TOLERANCE: +/- 0.8 MM

MODEL NO. GF0661MX		
APPROVED	CHECKED	DRAWING

SHOGYO INTERNATIONAL CORP.