




SHOGYO INTERNATIONAL CORP

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF0776MX (RoHS)				
1	NOMINAL SIZE	77 mm	3	inch	
2	IMPEDANCE	8 Ω \pm 15%	at. 800 Hz	1 V	
3	RESONANCE FO	360 Hz \pm 72 Hz	FO Hz	1 V	
4	S.P.L. LEVEL	79 dB/w \pm 3 dB	1 W 50 cm average at		
5	FREQ. RESPONSE	Fo Hz ~ 11K Hz	1K, 1.4K, 1.7K, 2K Hz		
6	INPUT POWER	Nominal Input 1 W	Handling Capacity 2 W		
7	OPERATION	Must be normal at program source 1 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2.82 V			
9	MAGNET	32 x 18 x 6 mm			
10	FLUX DENSITY	Gauss \pm 10% total flux max well within			
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise 1 W 24 Hours		
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	60 \pm 2 $^{\circ}$ C 20-50 % R.H. 24 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 \pm 2 $^{\circ}$ C 90-95 % R.H. 24 Hours		

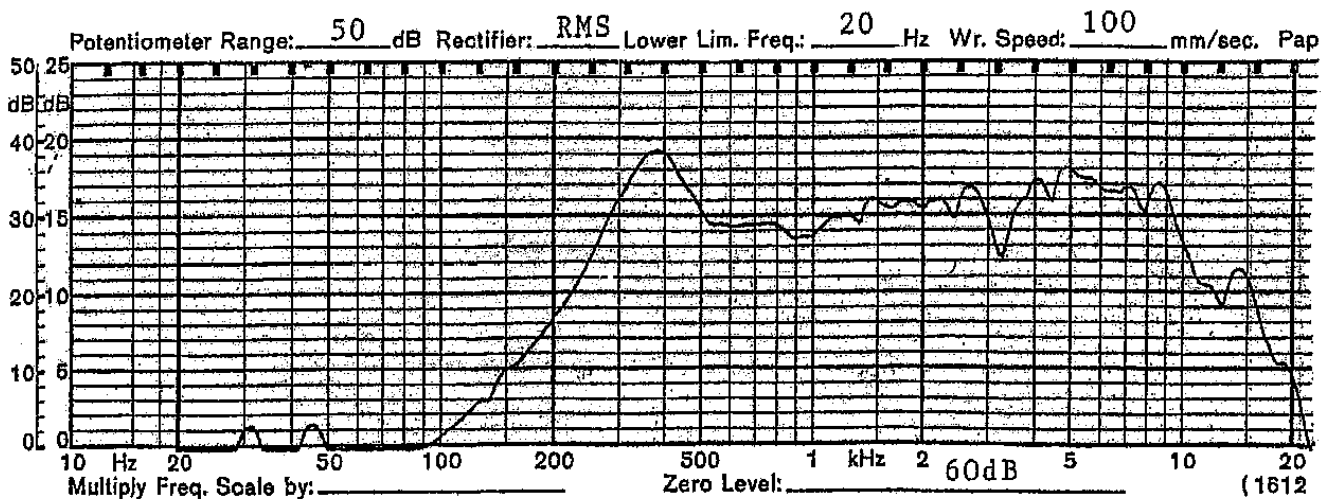

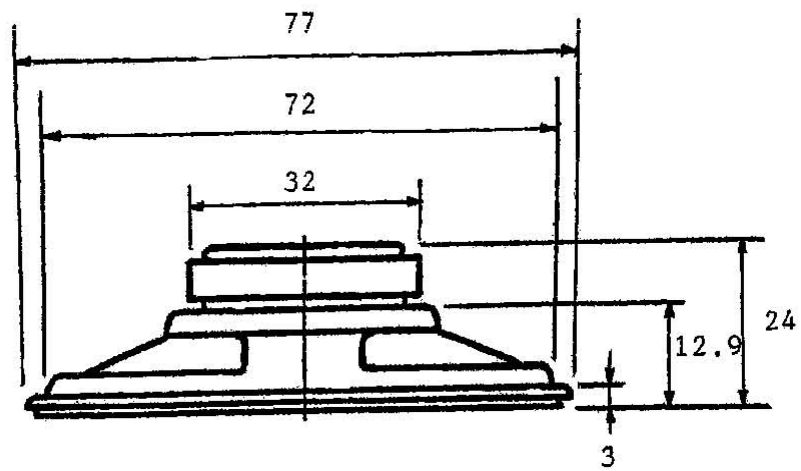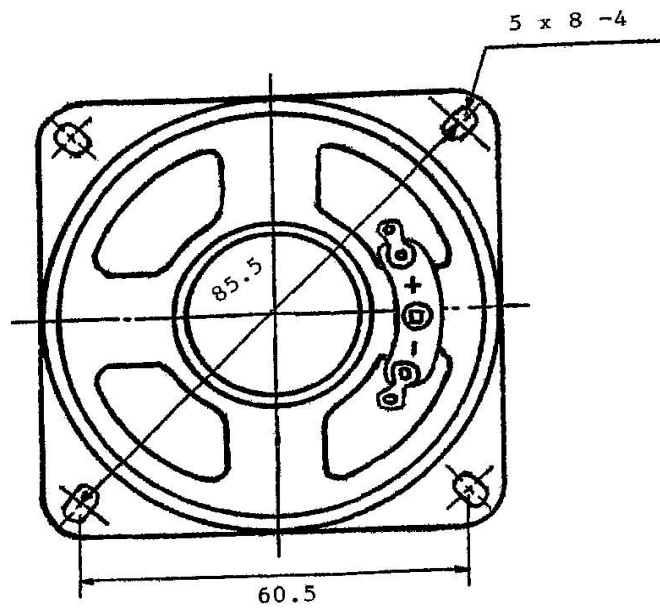

TOLERANCE: $\pm 0.8\text{MM}$

MODEL NO.		
GF0776MX		
APPROVED	CHECKED	DRAWING