

仕様
SPECIFICATION


1. 定格: MJ-14SR=DC12V 0.5A
Rating: MJ-15SR=DC12V 1A

2. 絶縁抵抗: DC500V/100MΩ以上。
Insulation resistance:
DC500V/100MΩMIN.


3. 耐電圧: AC500V 1分間。
Withstand voltage:
AC500V 1minute.

4. 接触抵抗: 30mΩ以下
Contact resistance:
30mΩMAX

5. 本製品はRoHS対応品とする。
This product is corresponding to RoHS.

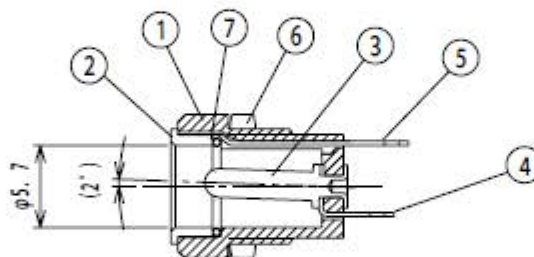

回路
CIRCUIT



	A部	適合プラグ MATE PLUG
MJ-14SR	φ2.0	φ5.5 X φ2.1
MJ-15SR	φ2.35	φ5.5 X φ2.5

7	CONTACT	CONTACTバネ	PBW	1	Ni	TOLERANCE	SCALE	DATE	DESING	DRAW	INSPE	APRO
7	CONTACT	CONTACTバネ	PBW	1	Ni	±0.3	2/1	06/7/4	K. S	N. I		M. K
6	NUT	六角ナット	STEEL	1	Ni							
5	TERMINAL B	ラグ B	BSR t=0.3	1	Ni							
4	TERMINAL A	ラグ A	BSR t=0.3	1	Ni	MODEL		QTY	PART NAME	DC JACK DCバワージャック		
3	PIN	ピン	BSBM	1	Ni	型式			品名	MJ-14SR, 15SR		
2	RING	リング	BSBM	1	Ni	MATERIAL				DRAW. NO	MJ14SR	
1	BODY	ホディー	PA	1		材質				図番		
LET	PART NAME	MATERIAL	QTY	FINISH	NOTE	処理	SHOGYO INTERNATIONAL CORPORATION					