


1 2 3 4 5 6 7

A

A

SCHEMATIC



MODEL NO




C

B

B

C


C

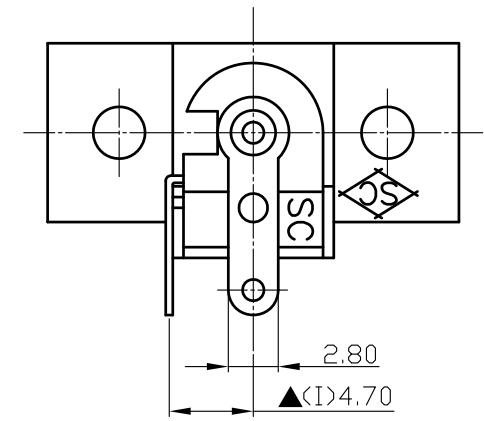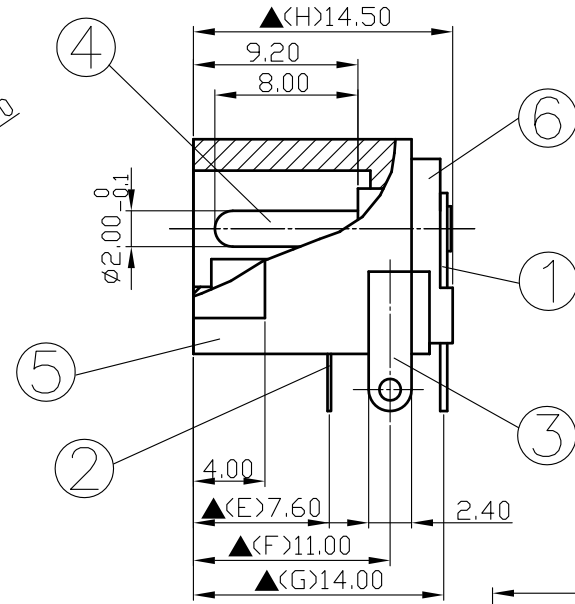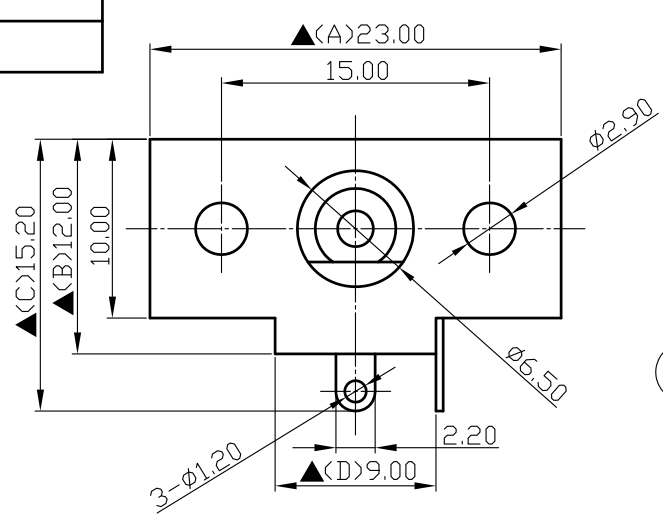

D

D

6.	Cover	PBT+30%	1	Black Color
5.	Housing	PBT+30%	1	Black Color
4.	Pin(2.0φ)	Brass	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

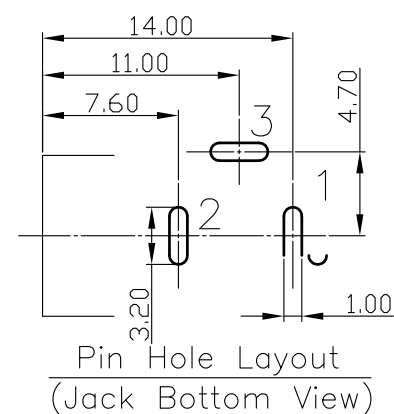

E

E



DATE

DWN


CHKD

APVD

MANAGER

10.07.2021

王平華

PART NAME: DC POWER JACK		PART NUMBER: SCD457CCS000B00G			VERSION:8.0	
TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE:1/1

SPECIFICATIONS:  
Contact Resistance : 30mΩ max  
Current Rating : Max 5.0A , 24V DC  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲ : The Most Important Dimension

For Redference  
僅供參考

RoHS&SVHC  
Compliant