


8.	Protective Spring	Iron Spring	1	Nickel Plated
7.	Bushing	PVC	1	Transparency
6.	Metal Housing	Brass	1	Nickel Plated
5.	Earth Terminal	Brass	1	Nickel Plated
4.	Terminal Insulator	ABS	1	Black Color
3.	Sleeve	Brass Rod	1	Nickel Plated
2.	Insulator (Tip & Ring)	ABS	2	Black Color
1.	Contact Head	Brass Rod	1	Nickel Plated
NO.	Description	Material	Q'TY	Finish

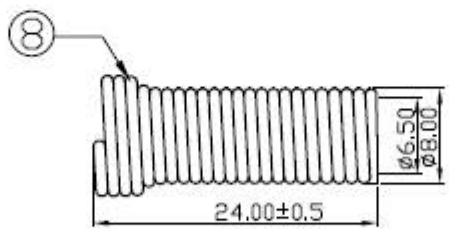

SHOGYO

DATE	DWN	CHKD	APVD	MANAGER
06.24.2024	王放策			

High Lead
Pb > 1000PPM

PART NAME : 6.3 ϕ PHONE PLUG	PART NUMBER: SCPG601SM0N0000G	VERSION:3.0
TOLERANCE : \pm 0.2mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:1/1

SPECIFICATIONS:
 Contact Resistance : 30m Ω max
 Insulation Resistance : 100M Ω min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲ : The Most Important Dimension