


PCB MOUNTING LAYOUT

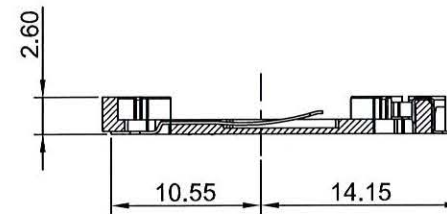

SPECIFICATION

- (1) PART NO. : CH7411-2016LF
- (2) MATERIAL:  
HOUSING: PPA UL94V0 BLACK COLOR  
CONTACT: PHOSPHOR BRONZE 0.1MM  
GOLD 1u" PLATED OVER NICKEL 50u" MIN
- (3) CONTACT RESISTANCE: 30mΩ MAX
- (4) INSULATION RESISTANCE: 100MΩ MIN
- (5) TEMPERATURE RANGE: -25° C TO +85° C
- (6) HUMIDITY: 40° C AND 90-95% RH FOR 96 HOURS
- (7) RoHS COMPLIANT

3				
2				
1	PART NO	17.06.23		
NO.	MODIFICATION	DATE	SCALE	2:1
General Tolerances			UNIT	MM
0 ~ >3	± 0.10	30 ~ >120 ± 0.30	MAT'L	SEE SPEC.
3 ~ >6	± 0.10	120 ~ >400 ± 0.50	DATE	APR. 23. 2019
6 ~ >30	± 0.20	Angle: ± 3°	<p>The Third Angle Projection</p>	

**SHOGYO INTERNATIONAL CORP.**  
**#CH7411-2016LF**  
 COIN CELL HOLDER