


LONG SOLDER LUG

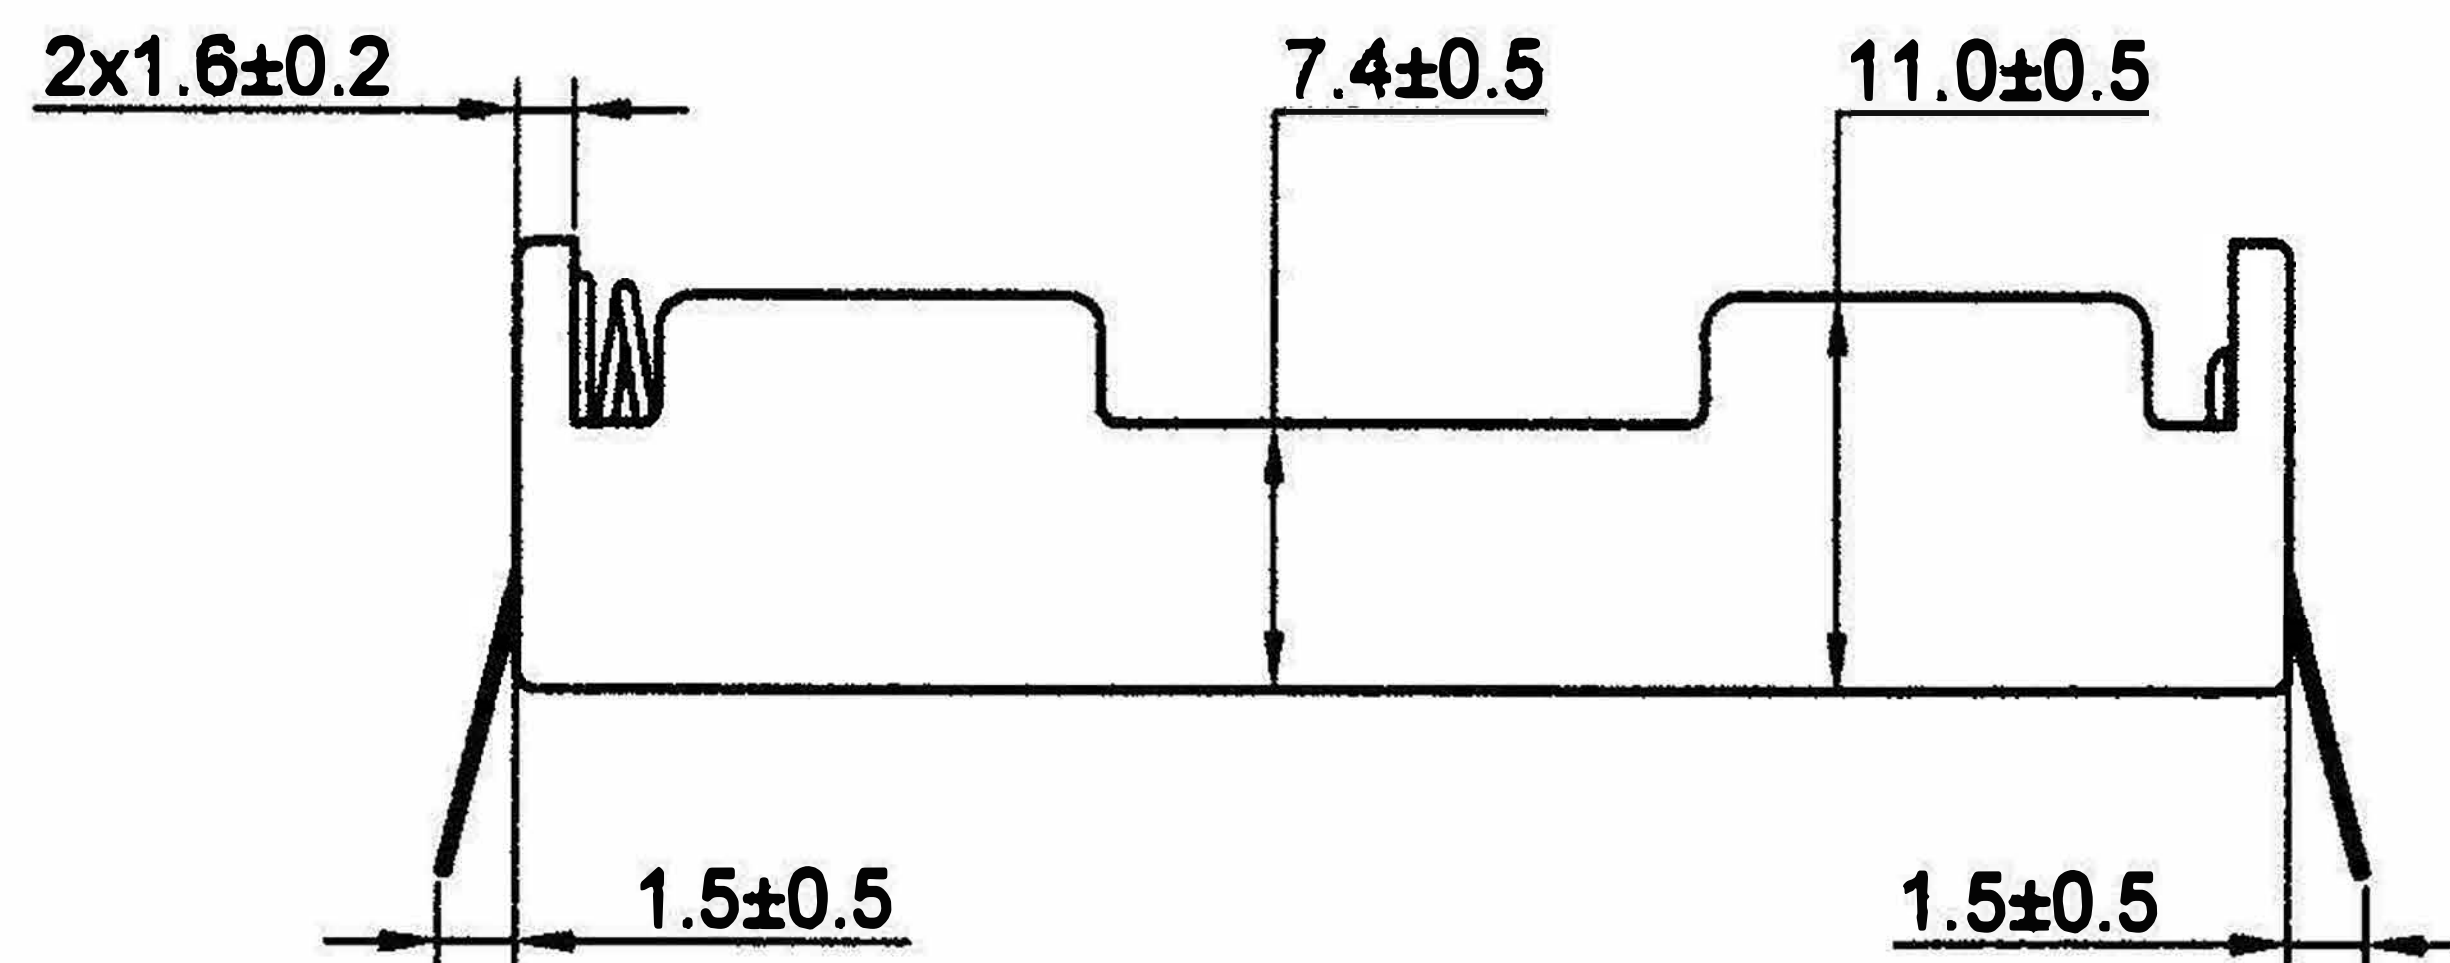

SPECIFICATIONS:

- (1) ITEM NO: BH-411-2DL
- (2) WITH: LONG SOLDER LUG, BRASS NICKEL PLATED
- (3) HOLDER MATERIAL: PP 94HB RESIN, BLACK COLOR
- (4) SPRING MATERIAL: Ø0.6MM SPRING STEEL NICKEL PLATED
- (5) RIVET MATERIAL: BRASS NICKEL PLATED
- (6) RoHS COMPLIANT

<table border="1"> <tr> <td>2</td> <td>Changed wire output holes from round to square</td> <td>Aug/30/12</td> </tr> <tr> <td>1</td> <td>Changed dimension from 45.20 to 46.50</td> <td>Aug/21/07</td> </tr> </table>	2	Changed wire output holes from round to square	Aug/30/12	1	Changed dimension from 45.20 to 46.50	Aug/21/07	SHOGYO INTERNATIONAL CORP.													
	2	Changed wire output holes from round to square	Aug/30/12																	
1	Changed dimension from 45.20 to 46.50	Aug/21/07																		
NO.	MODIFICATION	DATE	NAME	BATTERY HOLDER: BH-411-2DL																
			SCALE	1.5:1																
			APPD	<i>[Signature]</i> 9/3/12																
<table border="1"> <tr> <th colspan="4">General Tolerances</th> </tr> <tr> <td>0 ~ >3</td> <td>± 0.10</td> <td>30 ~ >120</td> <td>± 0.30</td> </tr> <tr> <td>3 ~ >6</td> <td>± 0.10</td> <td>120 ~ >400</td> <td>± 0.50</td> </tr> <tr> <td>6 ~ >30</td> <td>± 0.20</td> <td colspan="2">Anote: ± 3°</td> </tr> </table>			General Tolerances				0 ~ >3	± 0.10	30 ~ >120	± 0.30	3 ~ >6	± 0.10	120 ~ >400	± 0.50	6 ~ >30	± 0.20	Anote: ± 3°		UNIT	MM
General Tolerances																				
0 ~ >3	± 0.10	30 ~ >120	± 0.30																	
3 ~ >6	± 0.10	120 ~ >400	± 0.50																	
6 ~ >30	± 0.20	Anote: ± 3°																		
<p>The Third Angle Projection</p>			CHKD	<i>[Signature]</i> 9/3/12																
			DATE	JUN. 08. 2003																
			DWN	<i>[Signature]</i> 9/3/12																
			DR NO	4112DL-0703																