




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0351M-3X (RoHS)				
1	NOMINAL SIZE	16 x 35 mm	2	inch	
2	IMPEDANCE	8 Ω \pm 15%	at.	1.5K Hz	1 V
3	RESONANCE FO	650 Hz \pm 130 Hz	FO	Hz	1 V
4	S.P.L. LEVEL	83 dB/w \pm 3 dB	1 W 50 cm average at		
5	FREQ. RESPONSE	Fo Hz ~ 20K Hz	MAX	800, 1K, 1.2K, 1.5K Hz	
			10 dB		
6	INPUT POWER	Nominal Input 1 W	Handling Capacity 1.5 W		
7	OPERATION	Must be normal at program source 1 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2.9 V			
9	MAGNET	7.9 x 1.3 mm			
10	FLUX DENSITY	Gauss \pm 10% total flux max well within			
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise 1 W 24 Hours		
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	60 \pm 2 $^{\circ}$ C 20-50 % R.H. 24 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 \pm 2 $^{\circ}$ C 90-95 % R.H. 24 Hours		

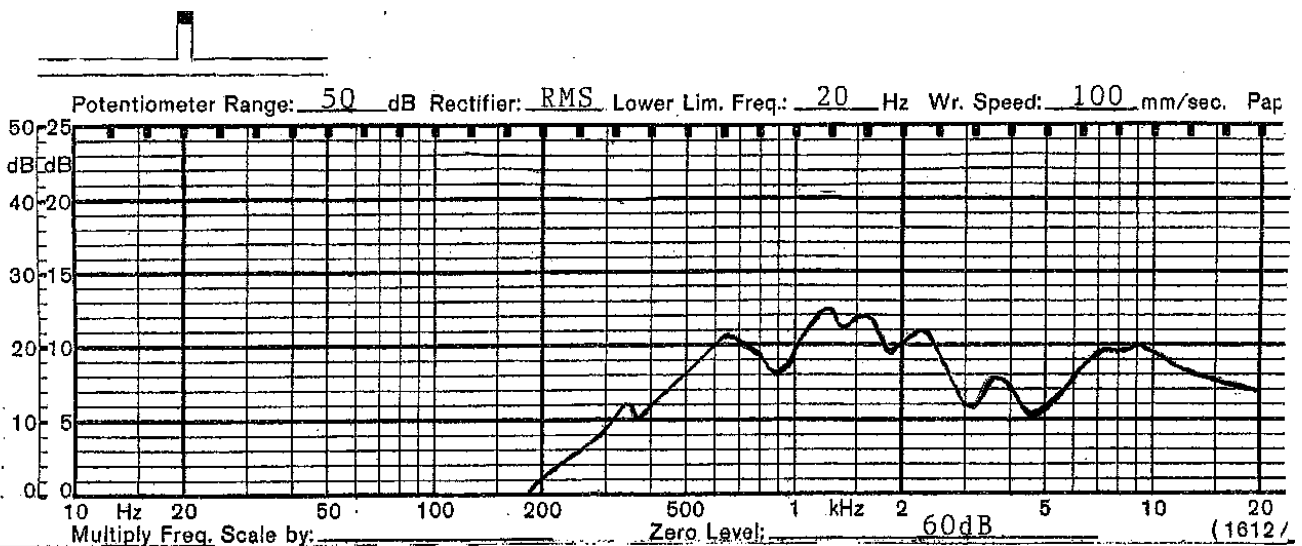

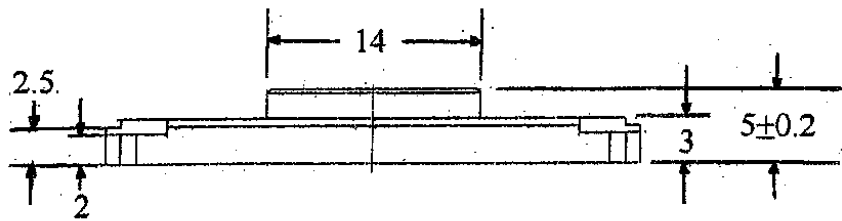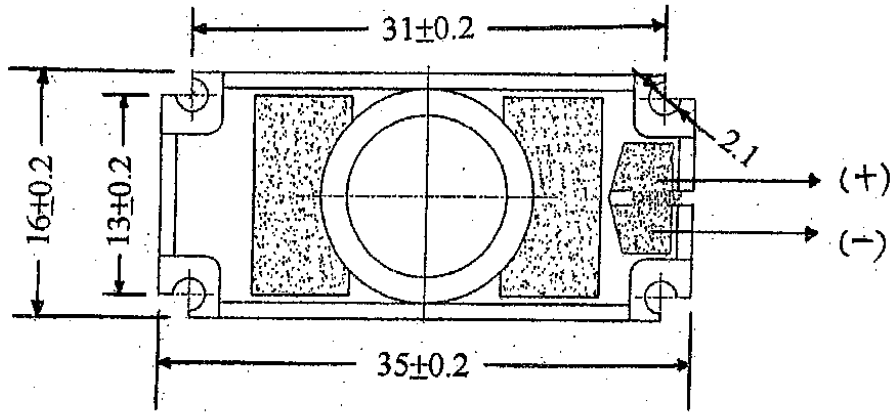

MODEL NO. GC0351M-3X

APPROVED	CHECKED	DRAWING