




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0351TX (RoHS)				
1	NOMINAL SIZE	35 mm	inch		
2	IMPEDANCE	8 Ω \pm 15%	at. 1.5K Hz 1 V		
3	RESONANCE FO	590 Hz \pm 118 Hz	FO Hz 1 V		
4	S.P.L. LEVEL	86 dB/w \pm 3 dB	1 W 50 cm average at		
5	FREQ. RESPONSE	Fo Hz ~ 20K Hz	MAX 10 dB	600, 800, 1K, 1.2K Hz	
6	INPUT POWER	Nominal Input 1 W	Handling Capacity 1.5 W		
7	OPERATION	Must be normal at program source 1 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2.9 V			
9	MAGNET	9.5 x 1.5 mm			
10	FLUX DENSITY	Gauss \pm 10% total flux max well within			
11	DISTORTION				
12	LOAD TEST	After test meet Item 7 and 8	White noise 1 W 24 Hours		
13	OPERATION TEMP.				
14	HEAT TEST	After test meet Item 7 and 8	65 \pm 2° C 20-50 % R.H. 24 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 \pm 2° C 90-95 % R.H. 24 Hours		

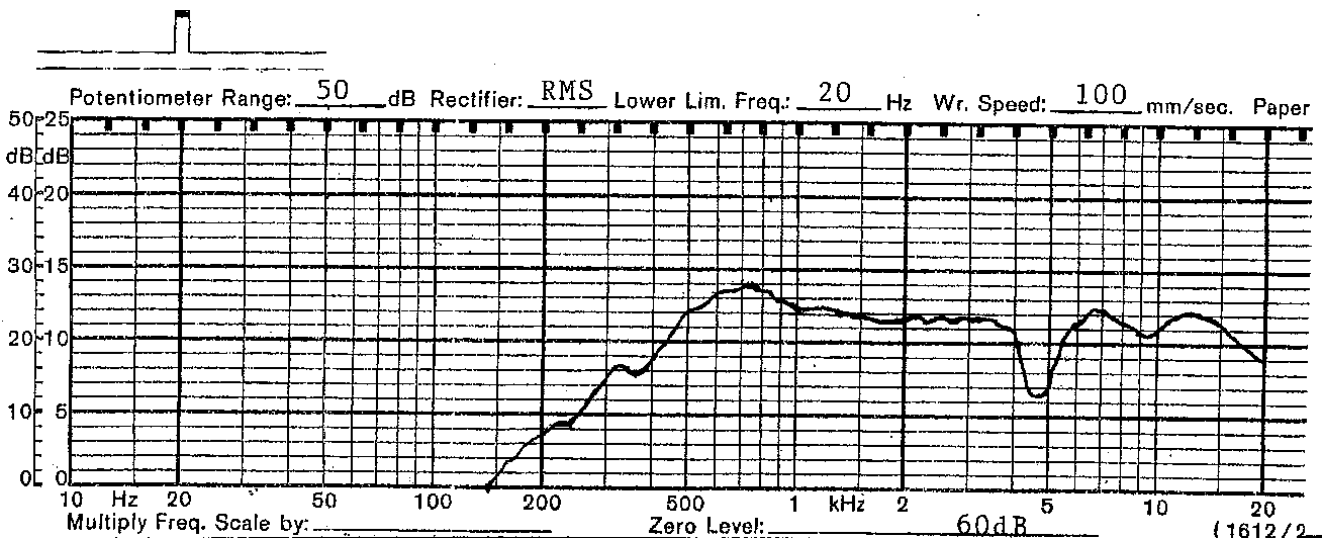

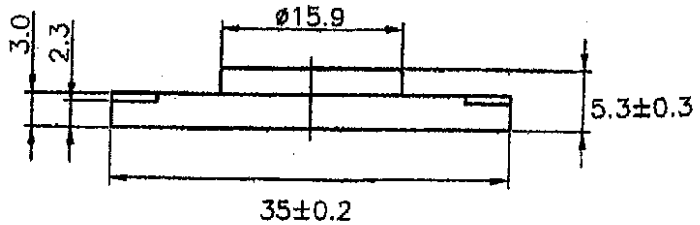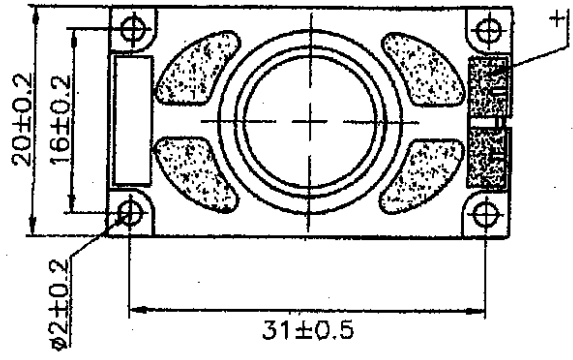

MOUNTING NOTICE:
 AT LEAST 0.8 M/M FOR DIAPHRAGM MOVING

MODEL NO. GC0351TX		
APPROVED	CHECKED	DRAWING