




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GC0571MBX (RoHS)		
1	NOMINAL SIZE	57 mm	2 inch
2	IMPEDANCE	8 Ω ± 15%	at. 1.5K Hz 1 V
3	RESONANCE FO	350 Hz ± 70 Hz	FO Hz 1 V
4	S.P. LEVEL	80 dB/w ± 3 dB	0.2 W 50 cm average at 600, 800, 1K, 1.2K Hz
5	FREQ. RESPONSE	Fo Hz ~ 20K Hz MAX 10 dB	
6	INPUT POWER	Nominal Input 0.2 W	Handling Capacity 0.4 W
7	OPERATION	Must be normal at program source 0.2 W	
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 1.3 V	
9	MAGNET	12.5 x 1.5 mm	
10	FLUX DENSITY	Gauss ± 10% total flux max well within	
11	TOTAL WEIGHT	gr	oz
12	LOAD TEST	After test meets Item 7 and 8	White noise 0.2 W 24 Hours
13	DISTORTION		
14	HEAT TEST	After test meets Item 7 and 8	65 ± 2° C 20-50 % R.H. 24 Hours
15	HUMIDITY TEST	After test meet Item 7 and 8	40 ± 2° C 90-95 % R.H. 24 Hours

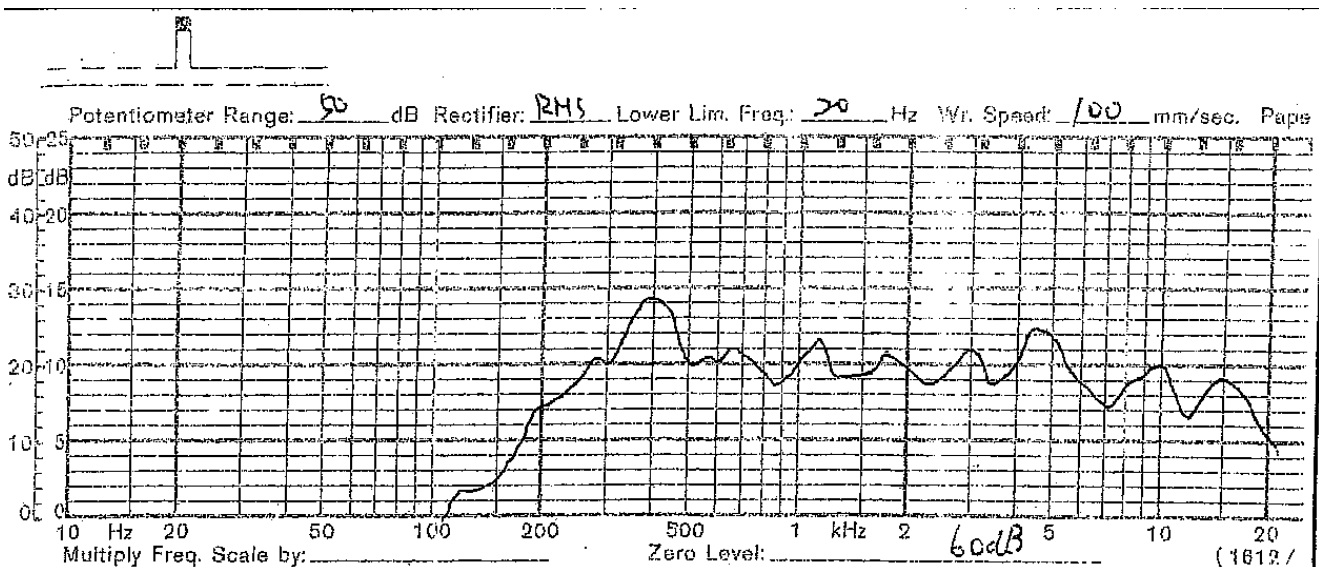

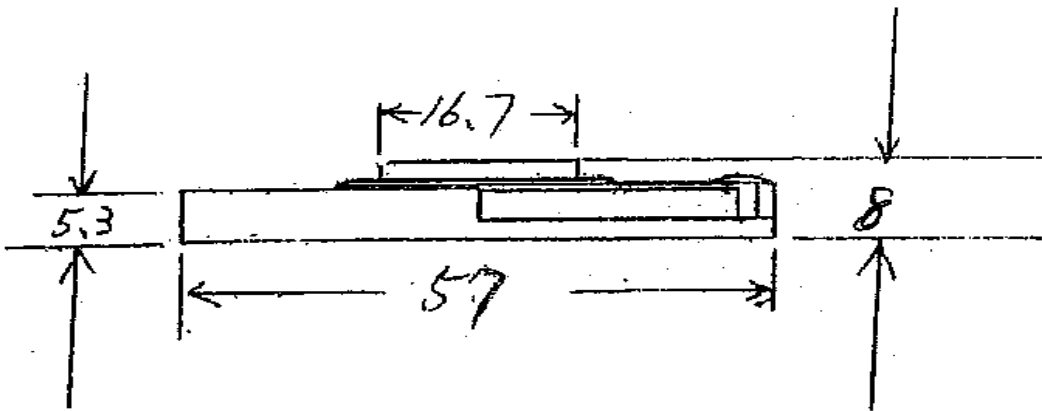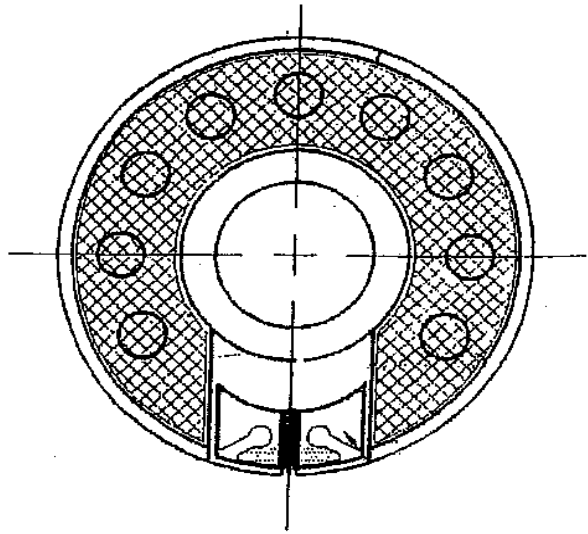

TOLERANCE: ± 0.2 MM

MODEL NO.

GC0571MBX

APPROVED

CHECKED

DRAWING