




SHOGYO INTERNATIONAL CORP.

www.shogyo.com

SPEAKER SPECIFICATIONS

MODEL NO.	GF0701MX (RoHS)				
1	NOMINAL SIZE	70 mm	2-3/4 inch		
2	IMPEDANCE	8 Ω ± 15%	at. 800 Hz		1 V
3	RESONANCE FO	350 Hz ± 70 Hz	FO Hz		1 V
4	S.P. LEVEL	88 dB/w ± 3 dB	1 W 50 cm average at		
5	FREQ. RESPONSE	Fo Hz ~ 9.5K Hz	MAX 10 dB	600, 800, 1K, 1.2K Hz	
6	INPUT POWER	Nominal Input 1 W		Handling Capacity 2 W	
7	OPERATION	Must be normal at program source 1 W			
8	BUZZ, RATTLE, ETC.	Must be normal at Sine Wave 2.82 V			
9	MAGNET	32 x 18 x 6 mm			
10	FLUX DENSITY	Gauss ± 10%	total flux max well within		
11	TOTAL WEIGHT	gr		oz	
12	LOAD TEST	After test meets Item 7 and 8	White noise 1 W 5 Hours		
13	DISTORTION				
14	HEAT TEST	After test meets Item 7 and 8	70 ± 2° C 20-50 % R.H. 5 Hours		
15	HUMIDITY TEST	After test meet Item 7 and 8	40 ± 2° C 90-95 % R.H. 5 Hours		

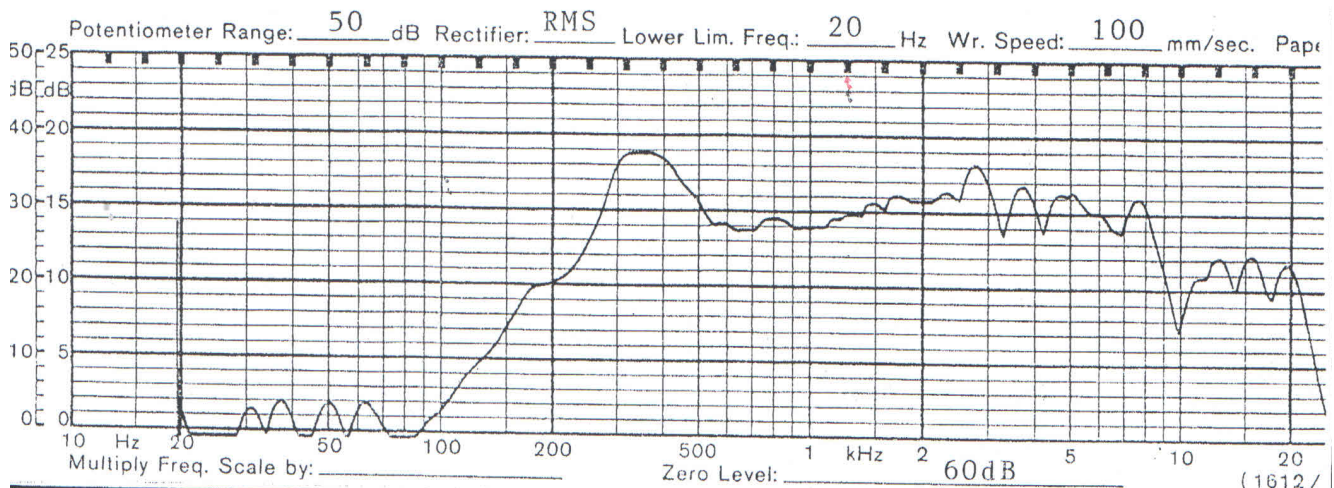

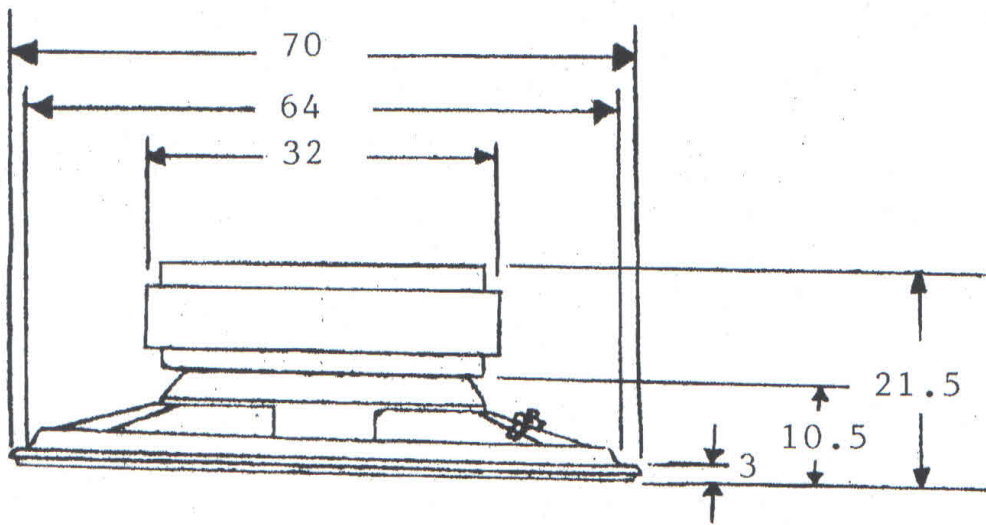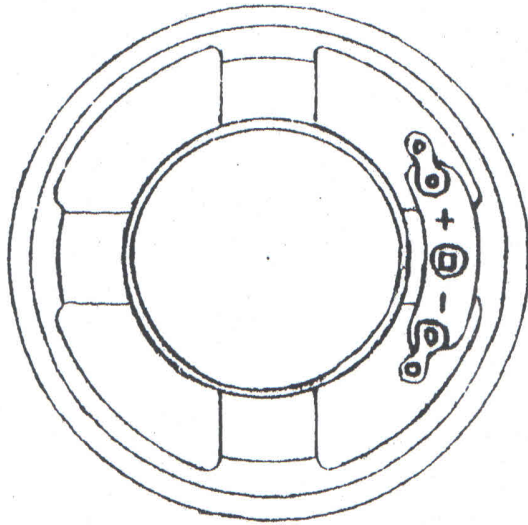

TOLERANCE: ± 0.8 MM

MODEL NO.		
GF0701MX		
APPROVED	CHECKED	DRAWING