
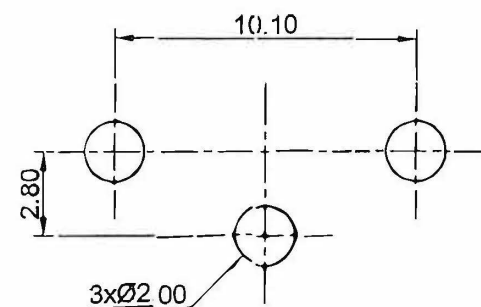
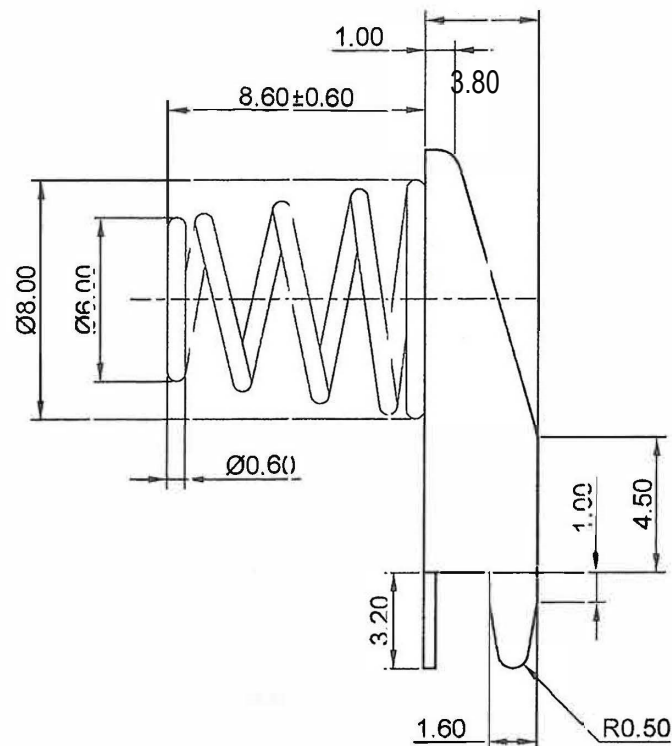


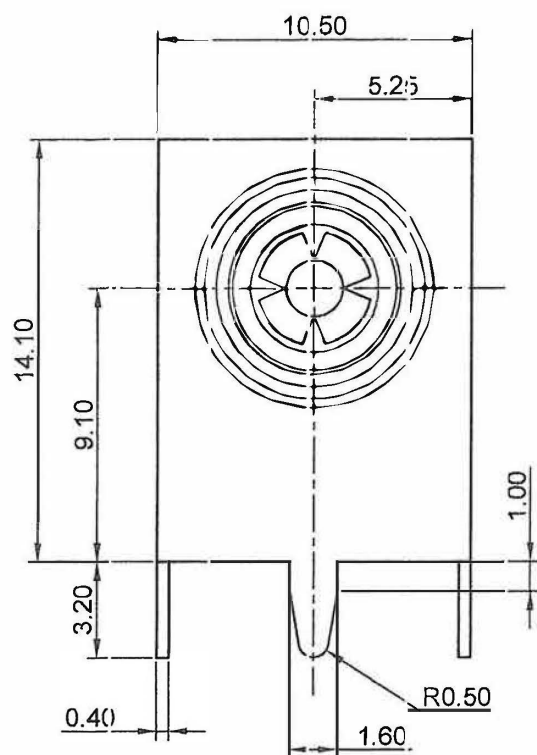

FCB/MOUNTING LAYOUT

NOTES:

- (1) PART NO: 315-3B
- (2) CONTACT MATERIAL: 0.4MM THICK BRASS NICKEL PLATED
- (3) SPRING MATERIAL: Ø 0.6MM SPRING STEEL NICKEL PLATED
EFFECTIVE NUMBER OF TURNS: 5
- (4) TOLERANCE: ISO 2768-M, UNLESS SPECIFIED
- (5) PROCESS CORNER: R=0.40MM
- (6) SURFACE: NO BURRS, NO GREASE
- (7) RoHS COMPLIANT

3			SHOGYO INTERNATIONAL CORP.			
2						
1			NAME	BATTERY CONTACT: 315-3B		
NO.	MODIFICATION	DATE	SCALE	1:1	APPD	
General Tolerances			UNIT	MM	CHKD	
0 ~ >3	± 0.10	30 ~ >120 ± 0.30	MAT'L	SEE SPEC.	DWN	
3 ~ >6	± 0.10	120 ~ >400 ± 0.50	DATE	SEP. 28. 2018	DR NO	D2-3153B-0918
6 ~ >30	± 0.20	Angle: ± 3°				

