


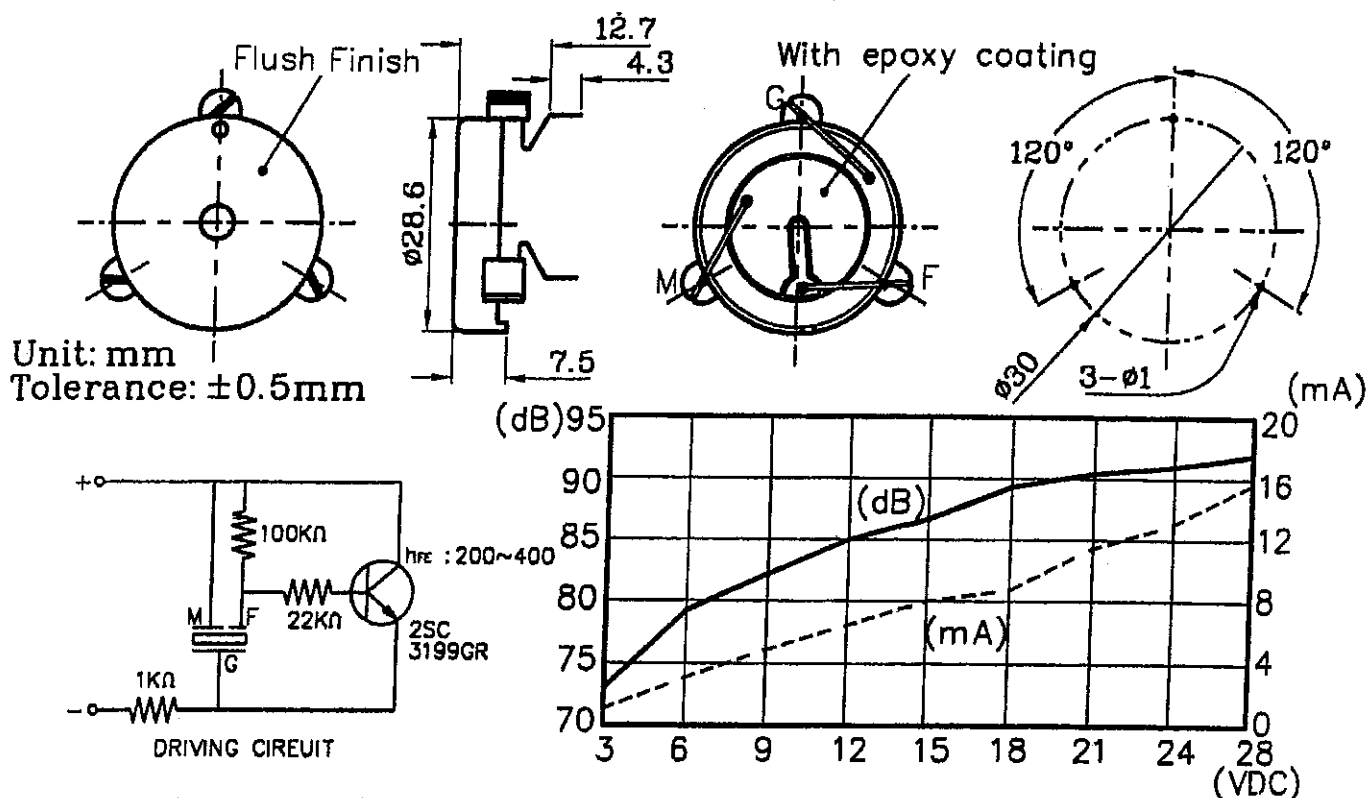

Resonant Frequency ($\pm 500\text{Hz}$)	3000
Operating Voltage (VDC)	3-28
Current Consumption at 12VDC (mA,maximum)	8
Sound Pressure Level(at DRIVING CIRCUIT) at 30cm/12VDC (dB,minimun)	83
Sound Pressure Level at 10cm/15Vp-p sine wave(dB,minimun)	90 at 3200Hz
Current Consumption (mA,maximum)	11
Capacitance at 1KHz/1V (G-M)($\pm 30\%$ pF)	16,000
Operating Temperature ($^{\circ}\text{C}$)	-20~+60
Storage Temperature ($^{\circ}\text{C}$)	-30~+70
Weight (Gram)	3.8

TITLE PIEZO CERAMIC AUDIO TRANSDUCER		PART NO. 1132 (RoHS)
APPROVALS		MATERIAL ABS UL-94 1/16" HB
DRAWN 2006/06/01	SCALE: 1:1	
CHECKED	UNIT: mm	
APPROVED	EDITION: 2	
	SHEET 1 OF 1	

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com