

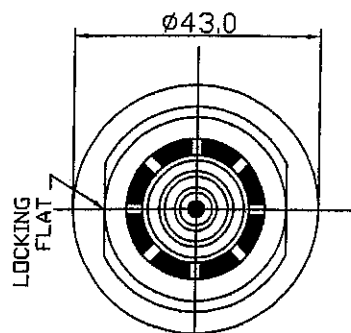





Unit:mm.
Tolerance:
±0.5mm.

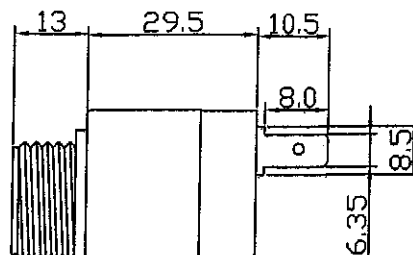


***Panel mounting(fits 1/8" dia. panel openings up to 1/4" thick)

Knurled Nut

(mA,)

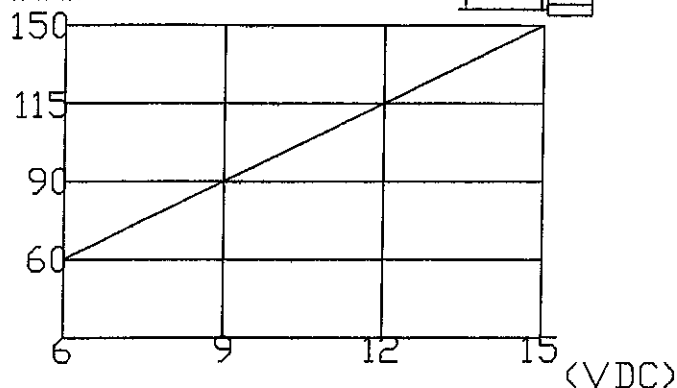

(NON-UL)

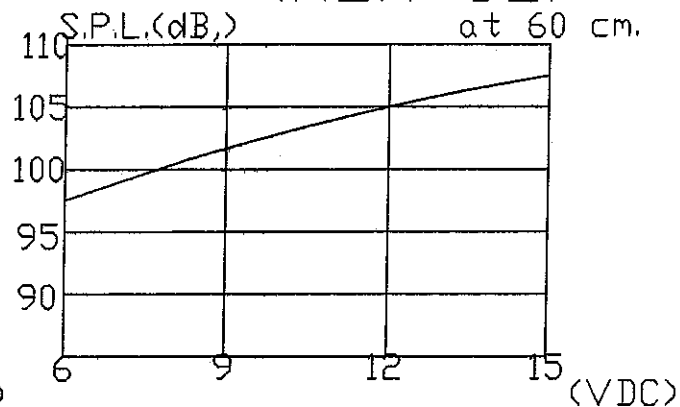

Oscillating Frequency(Hz)	1.2 - 4.0Khz.
Operating Voltage(VDC)	6 - 15
Tone	SWEEP
Operating Temperature(°)	-20~+60
Storage Temperature(°)	-20~+70
Weight (Gram)	68

PIEZO AUDIO INDICATOR		PART NO.
DRAWN 2012/6/1		2960(RoHS)
UNIT: mm.		
EDITION: 1		MATERIAL
SHEET 1 OF 1		ABS UL-94 1/16" HB

SHOGYO

SHOGYO INTERNATIONAL CORP.
6851 JERICHO TURNPIKE, SYOSSET, N.Y. 11791
TEL: (516) 921-9111 • FAX: (516) 921-3777
www.shogyo.com