

JS-608 SERIES

SPECIFICATIONS

1. Rating: 10A 125/250 VAC
16A 250 VAC
2. Contact resistance: 30 mΩ(max.)
3. Insulation resistance: DC 500V 100MΩ(Min)
4. Dielectric strength: 2000 VAC/ 1minute
5. Safety approval:


MATERIALS

1. Housing Nylon #66 UL 94V-2
2. Rocker: Nylon #66UL 94V-2
3. Terminal: Copper alloy Sn or Ag Plated
4. Contactor: Ag-cd-O alloy
5. Spring: Music wire

JS-608 - - - - -

Mounting hole	
R	22x28m/m
F	22x30m/m

Circuit	
A	4P ON-OFF
B	6P ON-ON
C	6P ON-OFF-ON
D	4P (ON)-OFF
F	6P (ON)-ON
G	6P (ON)-OFF-(ON)
H	6P ON-OFF-(ON)
AL	4P illuminated
BL	6P illuminated



Color Rocker/Housing	
B	Black
W	White
R	Red
I	Ivory
G	Green
H	Gray
Y	Yellow


Stamp

1	2	3	4	5	6	7


RoHS code

H = RoHS Compliant


JS-608RA-O-B/ B-2



JS-608FG-O-R/ W-4



JS-608RAL-O-R/ W-2

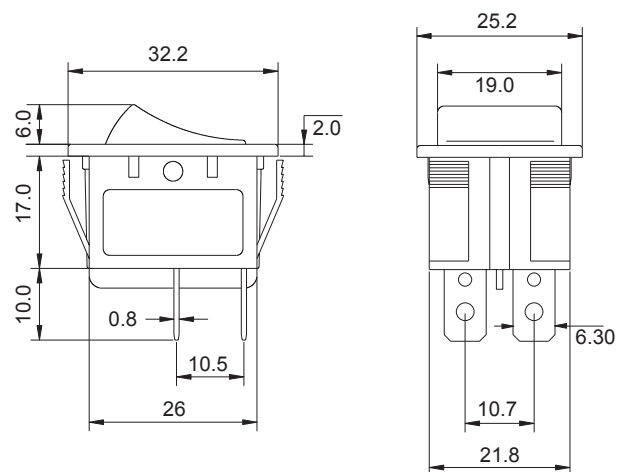

R	W	PANEL THICKNESS	F	W	PANEL THICKNESS
	28.0	0.75~1.25		30.0	0.75~1.25
	28.2	1.25~2.0		30.2	1.25~2.0
	28.5	2.0~3.0		30.5	2.0~3.0

