


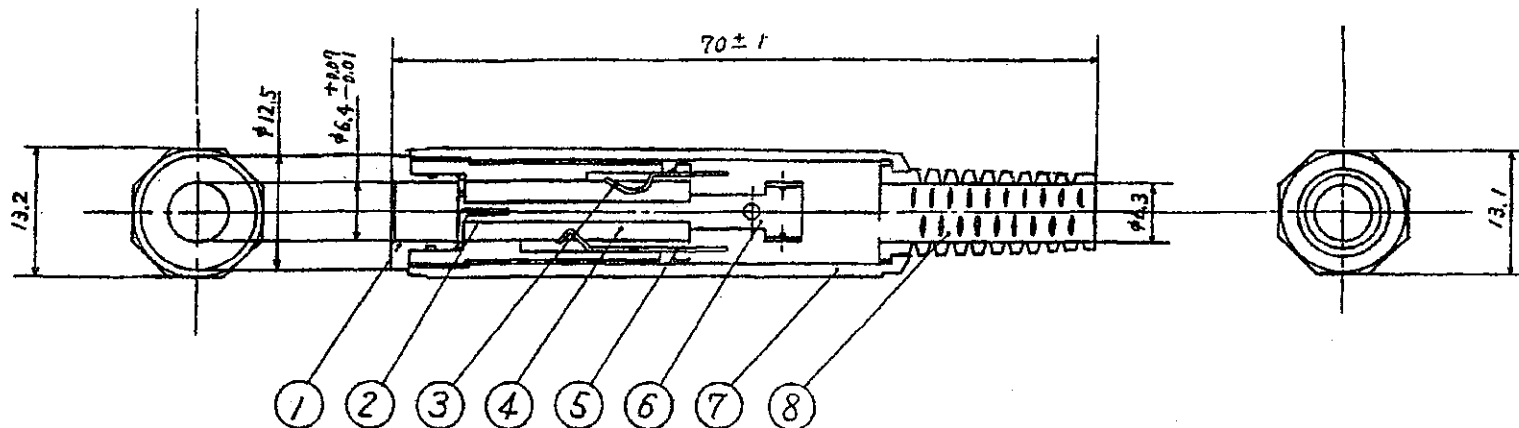

ELECTRICAL SPECIFICATION

BREAKDOWN VOLTAGE: 500V AC for one minute

INSULATION RESISTANCE: 100MΩ minimum at 500V DC

CONTACT RESISTANCE: 50mΩ maximum

8	CABLE PROTECTOR	1	PVC RESIN	
7	CAP	1	A.B.S. RESIN	
6	TERMINAL	1	STEEL	NI-PLATED
5	CONTACT B	1	PBS-EH t=0.3	AU-PLATED
4	BODY	1	POLYPHENYLENE OXIDE	
3	CONTACT A	1	PBS-EH t=0.3	NI-PLATED
2	CONTACT SPRING	1	PIANO WIRE #4	NI-PLATED
1	METAL SLEEVE	1	BRASS	NI-PLATED
LET	PART NAME	QTE	MATERIAL	REMARK
DRAWN	P. Xigawa	SCALE	2/1	

TOLERANCE $\pm 0.3\text{mm}$

SHOGYO INTERNATIONAL CORP.

MJ-117M