
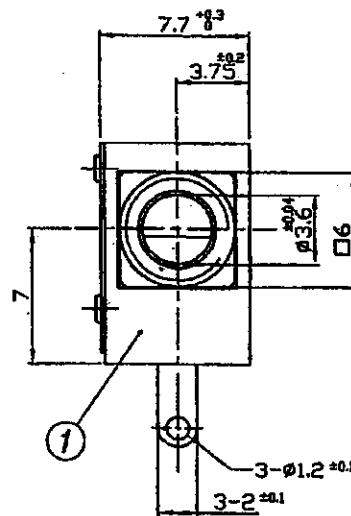
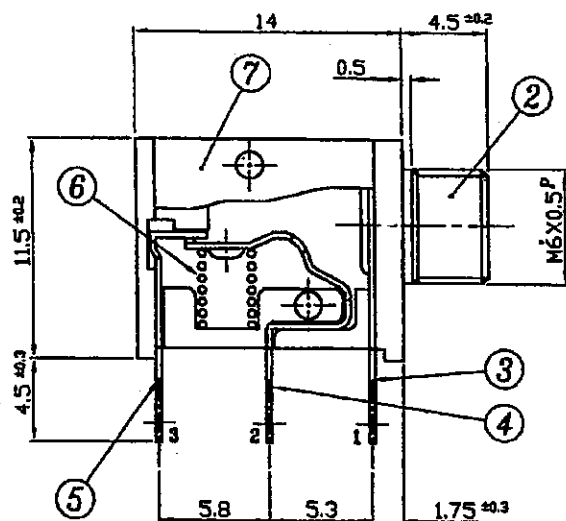


PC BOARD HOLE LAYOUT TOLS: ±0.1



DIMENSION DETAIL OF GAP BETWEEN
PLUG RING AND TIP SPRING


REVISION

LTR	DESCRIPTION	DATE	APPROVED

NOTES

1. THE JACK WAS DESIGNED TO COMPLY WITH JIS C 6560.
2. THE JACK SHALL BE MATED TO THE APPLICABLE MATE PLUG.
3. NATURE OF THE JACK SEE SPECIFICATIONS EJM-3-1135 SERIES.

TERMINAL NO.



CIRCUIT DIAGRAM

LET	PART NAME	QTY	MATERIAL	REMARK
7	COVER	1	PC RESIN	TRANSPARENT
6	SPRING	1	MUSIC WIRE	HEAT TREATED
5	SHUNT TERMINAL	1	BRASS 0.3t	Ag-PLATED
4	TIP SPRING	1	PB 0.3t	Ag-PLATED
3	EARTH TERMINAL	1	BRASS 0.3t	Ag-PLATED
2	BUSH	1	BRASS	Ni-PLATED
1	JACK CASING	1	PC/CF RESIN	BLACK

TOLERANCES

X ≤ 5 = ±0.10

X > 5 = ±0.30

ANGULAR = ±

DO NOT SCALE DWG.


FINISHED

MATL

AS SHOWN IN TABLE

DATE

26-03-2009



SCALE

3/1 mm

DRN / APPD.

Y.H.TSANG/K.F.M

SHOGYO INTERNATIONAL CORP.

MJ-352

3.5mm EARPHONE JACK