


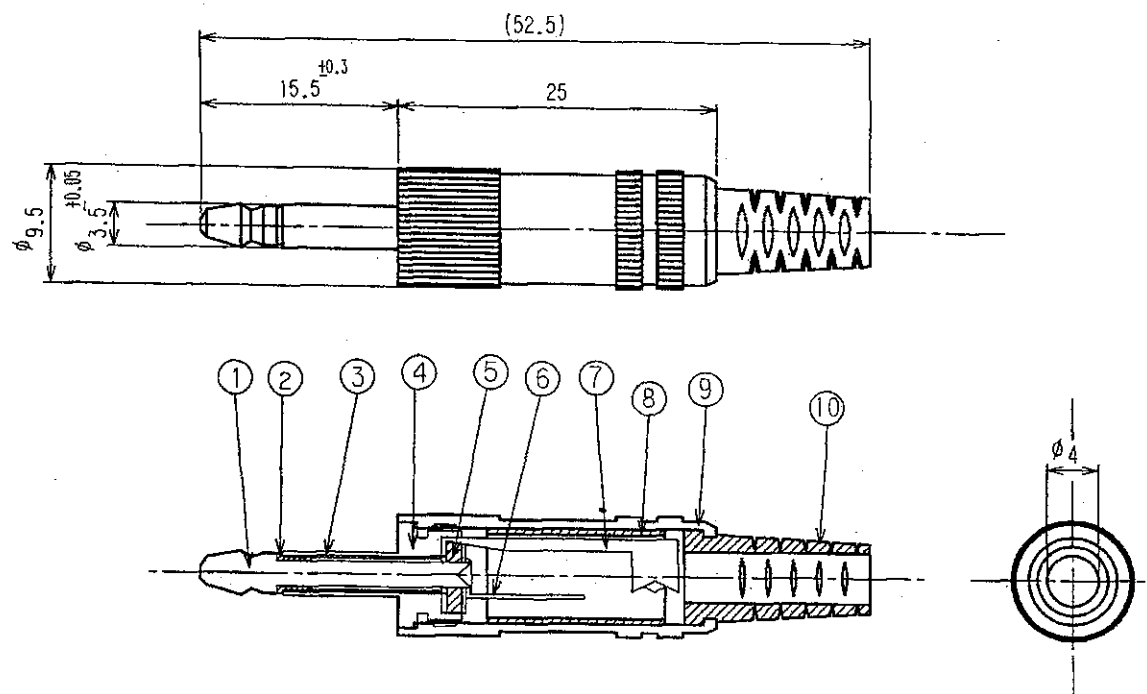

#### SPECIFICATION

DIELECTRIC STRENGTH:500V AC FOR ONE MINUTE.

CONTACT RESISTANCE:50mΩ MAX

INSULATION RESISTANCE:100MΩ MIN.AT 500V DC.

|    |                 |     |          |        |
|----|-----------------|-----|----------|--------|
| 10 | CABLE PROTECTOR | 1   | PVC      |        |
| 9  | CAP             | 1   | BRASS    | NI     |
| 8  | INSULATOR D     | 1   | PVC      |        |
| 7  | TERMINAL B      | 1   | STEEL    | NI     |
| 6  | TERMINAL A      | 1   | STEEL    | NI     |
| 5  | INSURATOR C     | 1   | PF       |        |
| 4  | SLEEVE          | 1   | BRASS    | NI     |
| 3  | INSURATOR B     | 1   | PVC      |        |
| 2  | INSULATOR A     | 1   | EBONITE  |        |
| 1  | CONTACT         | 1   | BRASS    | NI     |
| No | PART NAME       | QTY | MATERIAL | FINISH |

| TOLERANCE | SCALE |
|-----------|-------|
| ±0.5      | 2/1   |

**SHOGYO INTERNATIONAL CORP.**

**#MP-106PC**