
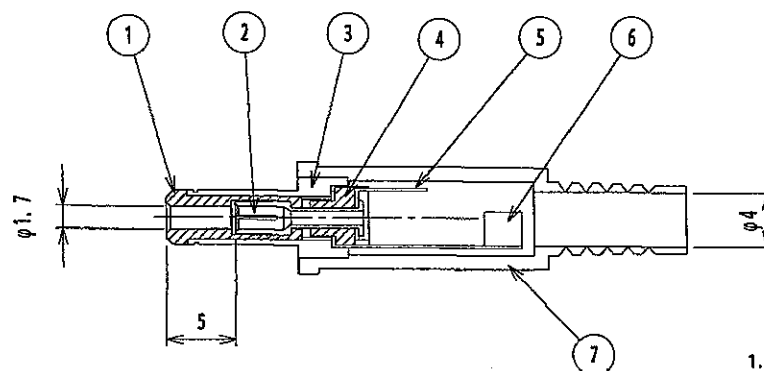

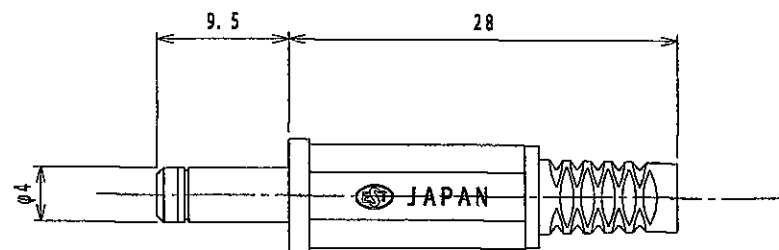




#### SPECIFICATION

1. RATING: DC6.3V 2A
2. WITHSTANDING VOLTAGE : 500V AC FOR 1MINUTE
3. INSULATION RESISTANCE: 100MΩ MIN. AT 500V DC
4. CONTACT RESISTANCE: 30mΩ MAX

| 7   | CAP         | PE       | 1   |        |      | TOLERANCE | SCALE | DATE   |
|-----|-------------|----------|-----|--------|------|-----------|-------|--------|
| 6   | TERMINAL B  | BRASS    | 1   | Ni     |      | ±0.3      | 2/1   | 7/5/19 |
| 5   | TERMINAL A  | BRASS    | 1   | Ni     |      |           |       |        |
| 4   | INSULATOR B | PC       | 1   |        |      |           |       |        |
| 3   | CONTACT B   | BRASS    | 1   | Ni     |      |           |       |        |
| 2   | CONTACT A   | BRASS    | 1   | Ni     |      |           |       |        |
| 1   | INSULATOR A | POM      | 1   |        |      |           |       |        |
| LET | PART NAME   | MATERIAL | QTY | FINISH | NOTE |           |       |        |

**SHOGYO INTERNATIONAL CORP.**

**#MP-202**