

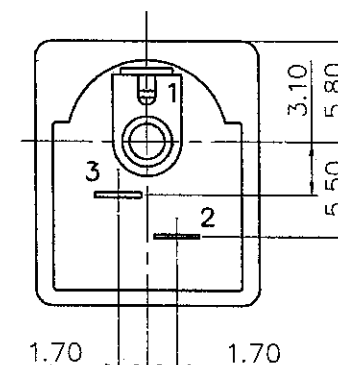
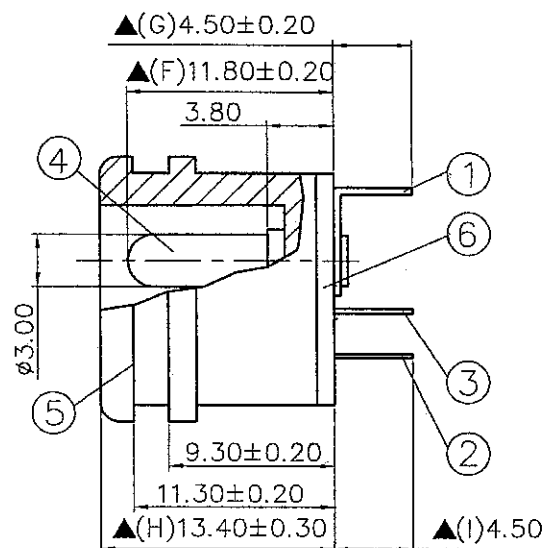


SCHEMATIC	
MODEL NO	C

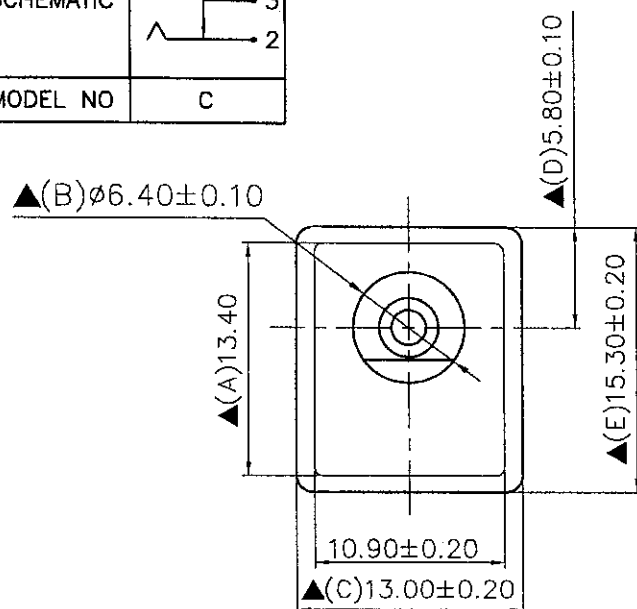

6.	Insulator	1.0T Bakelite	1	Natural
5.	Housing	POM	1	Black Color
4.	Pin(3.0 ϕ)	Copper	1	Nickel Plated
3.	Break Terminal	0.3T Brass	1	Silver Plated
2.	Sleeve Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q' TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		11.28.2012				
PART NAME : DC POWER JACK					VERSION:6.0	
TOLERANCE : ± 0.3 mm UNLESS OTHERWISE SPECIFIED				UNIT:mm		SCALE:1/1

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30m Ω max
Current Rating : Max 5.0A , 24VDC
Insulation Resistance : 100M Ω min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most important Dimension

SHOGYO INTERNATIONAL CORP.

#SCD525GCS000B00G