

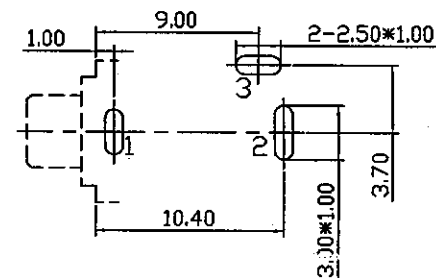

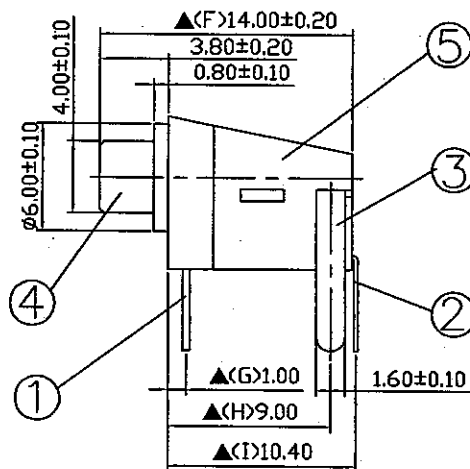
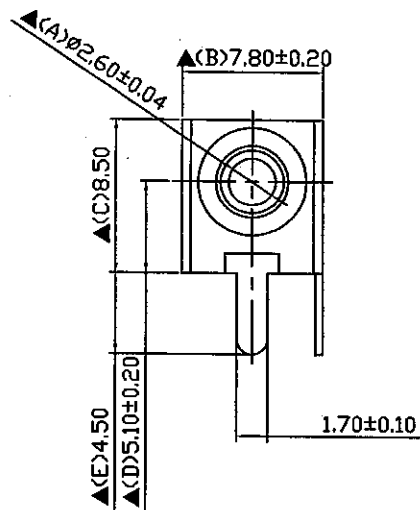


SCHEMATIC	
MODEX NO	Y



5.	Housing	POM	1	Black Color
4.	Barrel(W/Thread)	Brass	1	Nickel Plated
3.	Break Terminal	0.4T Brass	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Pin Terminal	0.4T Brass	1	Silver Plated
NO.	Description	Material	Q' TY	Finish

		DATE	DWN	CHKD	APVD	MANAGER
		11.30.2005				
PART NAME : 2.5φ PHONE JACK					VERSION:2.0	
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm		SCALE:1/1	

RoHS
Compliant

For Reference
僅供參考

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ218M0NYS0B00G