


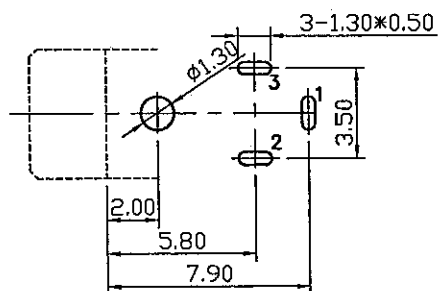
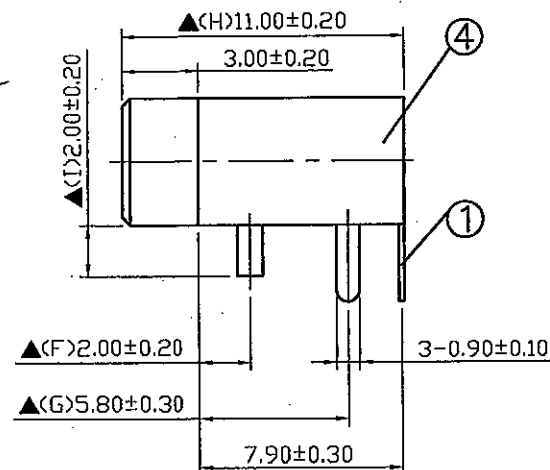


SCHEMATIC	
MODEX NO	H

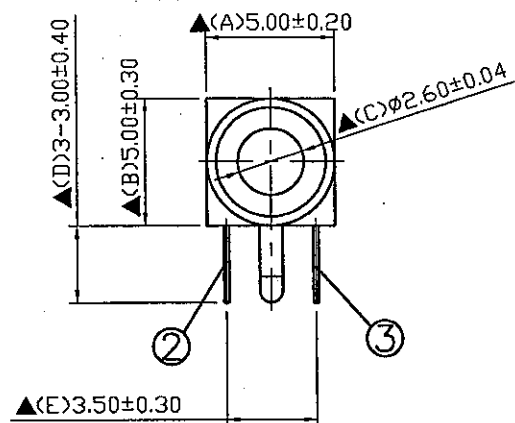

Pin Hole Layout
(Jack Bottom View)



4.	Housing	POM	1	Black Color
3.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1.	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
NO.	Description	Material	Q'TY	Finish

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲ : The Most Important Dimension

RoHS
Compliant

For Reference
僅供參考

DATE	DWN	CHKD	APVD	MANAGER
11.30.2005				

PART NAME : 2.5mm PHONE JACK

VERSION:2.0

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SCALE: /

SHOGYO INTERNATIONAL CORP.

#SCJ224P00HS0B00G