
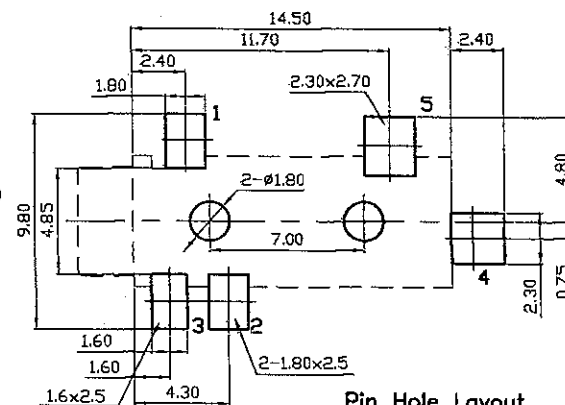

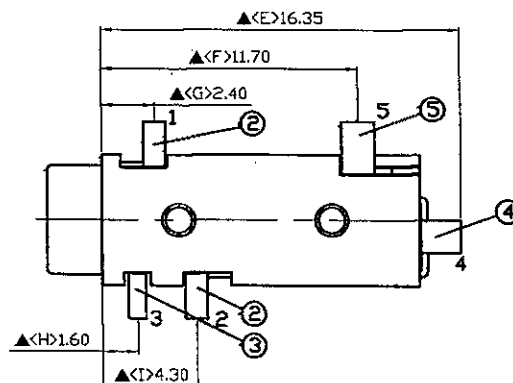


COPLANARITY  
SCALE<2:1>

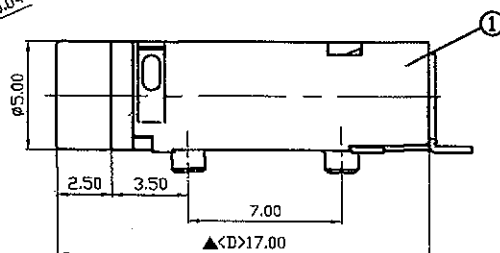

Pin Hole Layout  
(Jack Bottom View)

0.2T TiCuR1-M-EH

| 5.  | Tip Spring       | 0.3T Phosphor Bronze | 1    | Silver Plated |
|-----|------------------|----------------------|------|---------------|
| 4.  | Shunt Terminal B | 0.3T Bronze          | 1    | Silver Plated |
| 3.  | Shunt Terminal A | 0.2T Bronze          | 1    | Silver Plated |
| 2.  | Earth Terminal   | 0.2T TiCuR1-M-EH     | 2    | Silver Plated |
| 1.  | Housing          | PA9T                 | 1    | Black Color   |
| NO. | Description      | Material             | Q'TY | Finish        |

| DATE       | DWN | CHKD |
|------------|-----|------|
| 12.01.2010 |     |      |

PART NAME: 3.5 $\phi$  PHONE JACK

TOLERANCE:  $\pm 0.3\text{mm}$  UNLESS OTHERWISE SPECIFIED UNIT: mm

RoHS  
Pb Free Process

#### SPECIFICATIONS:

Contact Resistance :  $30\text{m}\Omega$  max  
Insulation Resistance :  $100\text{M}\Omega$  min. at DC500V  
Dielectric Withstand Voltage: AC 500V for one minute  
Remark:  $\Delta$ : The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**

**#SCJ316P00(\*)S0B00G**