


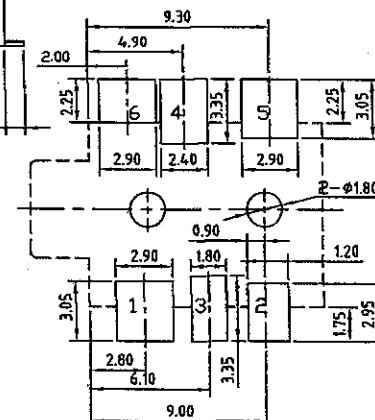
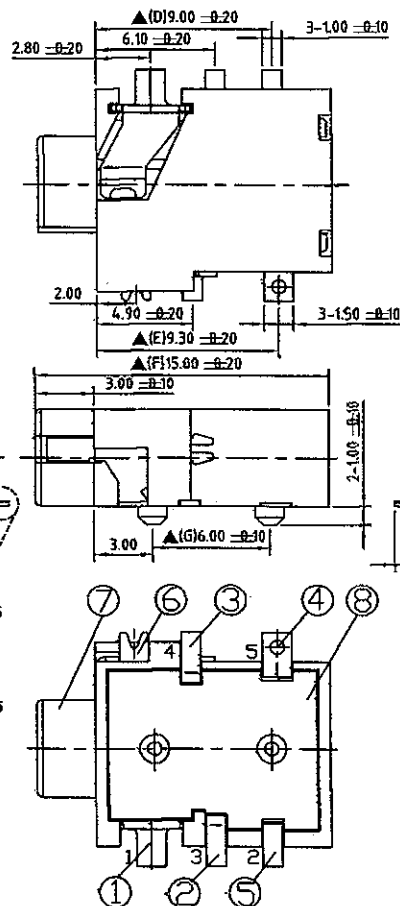


J

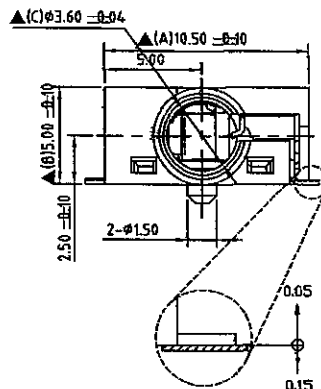

L



Pin Hole Layout
(Jack Bottom View)

RoHS
Pb Free Process

8.	Cover	PA9T	1	Black Color
7.	Housing	PA9T	1	Black Color
6.	Earth Terminal	0.25T Phosphor Bronze	1	Gold Plated
5.	Ring Spring	0.2T TiCuR1-M-EH	1	Gold Plated
4.	Ring Spring	0.2T TiCuR1-M-EH	1	Gold Plated
3.	Tip Spring	0.3T Brass	1	Gold Plated
2.	Tip Spring	0.3T Brass	1	Gold Plated
1.	Earth Terminal	0.3T Phosphor Bronze	1	Gold Plated
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
12.28.2011		


SPECIFICATIONS:

Contact Resistance : 30mΩ max
 Insulation Resistance : 100MΩ min. at DC 500V
 Dielectric Withstanding Voltage: AC 500V for one minute
 Remark: ▲: The Most Important Dimension

PART NAME : 3.5φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm



SHOGYO INTERNATIONAL CORP.

SCJ327P00(*)G0B02G