

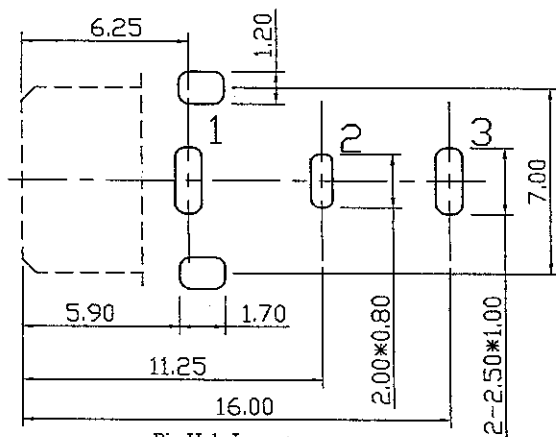
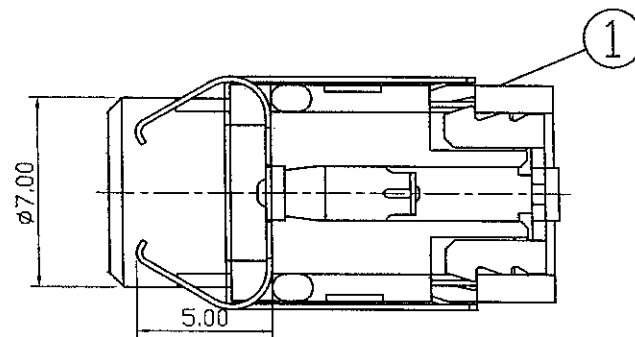


SCHEMATIC	1 2 3
MODEL NO	X

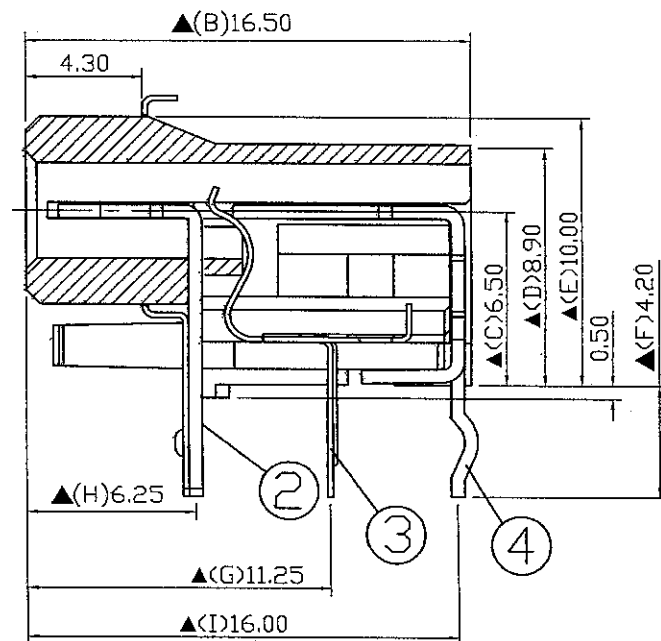

Pin Hole Layout
Jack Bottom View

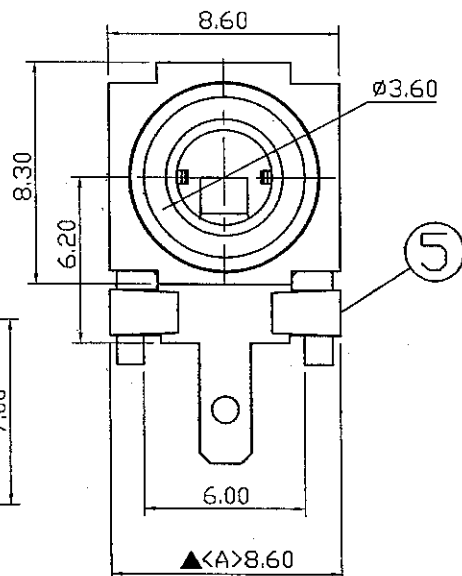

5.	Metal Shell	0.2 Phosphor Bronze	1	Light TIN Plated
4.	Ring Spring	0.5 Brass	1	Silver Plated
3.	Tip Spring	0.2 Phosphor Bronze	1	Silver Plated
2.	Sleeve Spring	0.5 Brass	1	Silver Plated
1.	Housing	PBT	1	Black Color
NO.	Description	Material	Q'TY	Finish

DATE	DWN	CHKD
01.04.2012		

PART NAME: 3.5Ø PHONE JACK

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

RoHS
Compliant

SPECIFICATIONS:

Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.

SCJ337P00XS1BN0G