




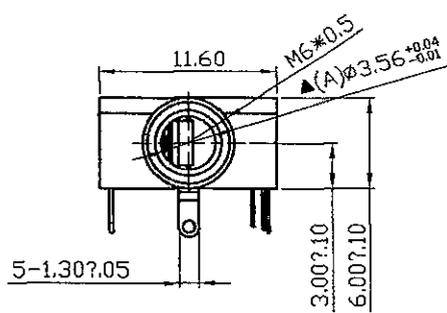
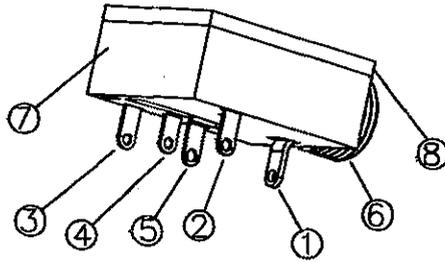


Schematic	
MODEL NO	R

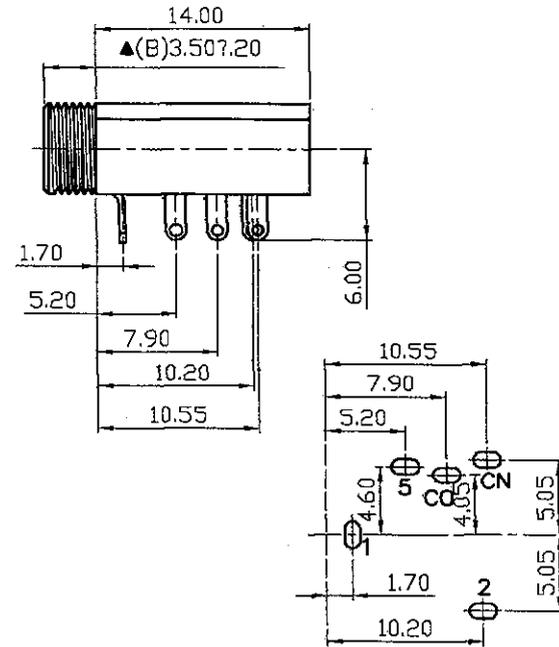

NUT

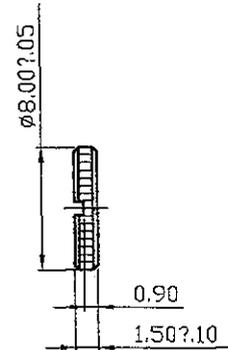

Pin Hole Layout  
(Jack Bottom View)

NO	Description	Material	Q'TY	Finish
9	NUT	1.50T Brass	1	Nickel Plated
8	Cover	PC	1	Trans Parent
7	Housing	PA66	1	Black Color
6	Barrel(With Thread)	Brass	1	Nickel Plated
5	Tip Spring	0.25T Phosphor Bronze	1	Silver Plated
4	CO Terminal	0.2T Phosphor Bronze	1	Silver Plated
3	CN Terminal	0.2T Phosphor Bronze	1	Silver Plated
2	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.4T Brass	1	Silver Plated

DATE	DWN	CHKD
10.10.2011		

PART NAME :3.5φ PHONE JACK

TOLERANCE :±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm 

RoHS  
Pb Free Process

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
 Insulation Resistance : 100MΩ min. at DC 500V  
 Dielectric Withstanding Voltage: AC 500V for one minute  
 Remark: ▲ : The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**

# SCJ354M1NRS1B00G