
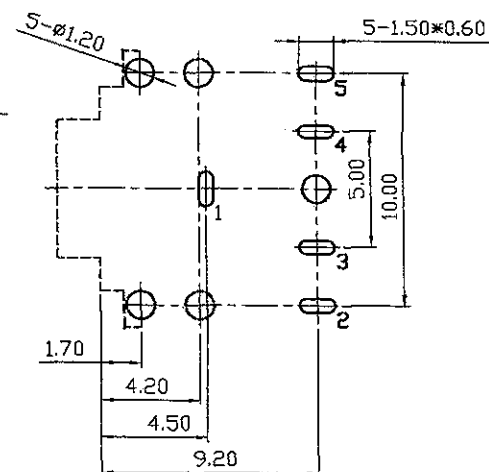
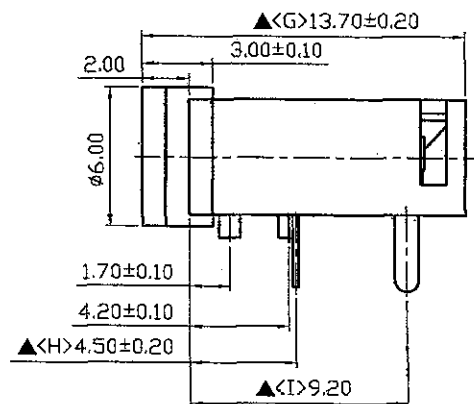
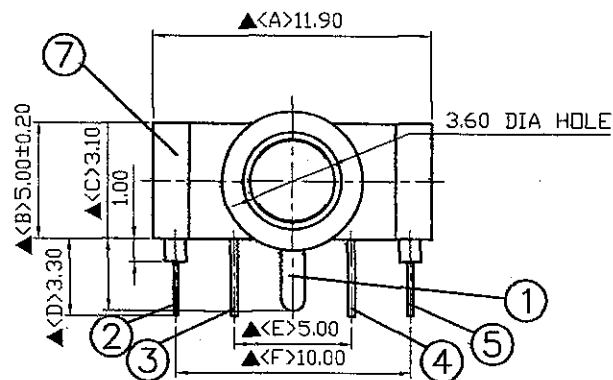
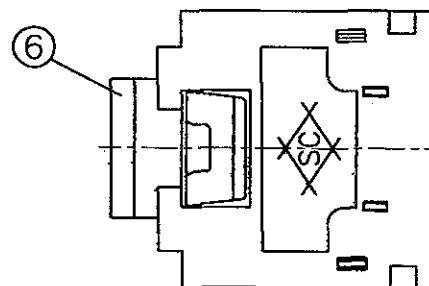


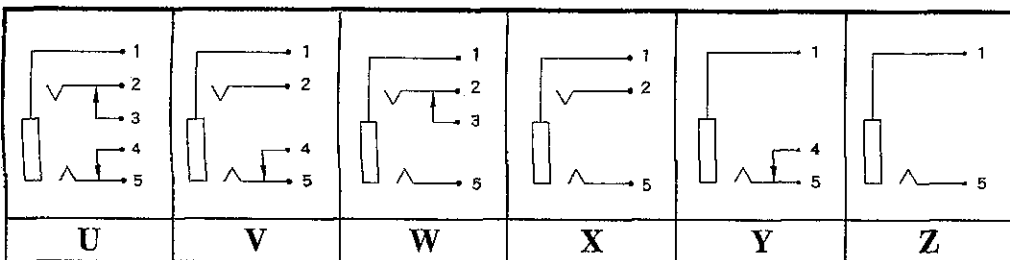

Pin Hole Layout  
(Jack Bottom View)

| 7.  | Housing        | PBT                  | 3    | Black Color   |
|-----|----------------|----------------------|------|---------------|
| 6.  | Barrel         | Brass                | 1    | Nickel Plated |
| 5.  | Tip Spring     | 0.25T TicuR1-M-EH    | 1    | Silver Plated |
| 4.  | Break Terminal | 0.3T Brass           | 1    | Silver Plated |
| 3.  | Break Terminal | 0.3T Brass           | 1    | Silver Plated |
| 2.  | Ring Spring    | 0.2T TicuR1-M-EH     | 1    | Silver Plated |
| 1.  | Earth Terminal | 0.2T Phosphor Bronze | 1    | Silver Plated |
| NO. | Description    | Material             | Q'TY | Finish        |

| DATE       | DWN | CHKD |
|------------|-----|------|
| 10.10.2011 |     |      |

PART NAME: 3.5φ PHONE JACK

TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED

UNIT:mm

SPECIFICATIONS:

Contact Resistance : 30mΩ max  
Insulation Resistance : 100MΩ min. at DC 500V  
Dielectric Withstanding Voltage: AC 500V for one minute  
Remark: ▲: The Most Important Dimension

**SHOGYO INTERNATIONAL CORP.**

# SCJ355R1N(\*)S0B00G