


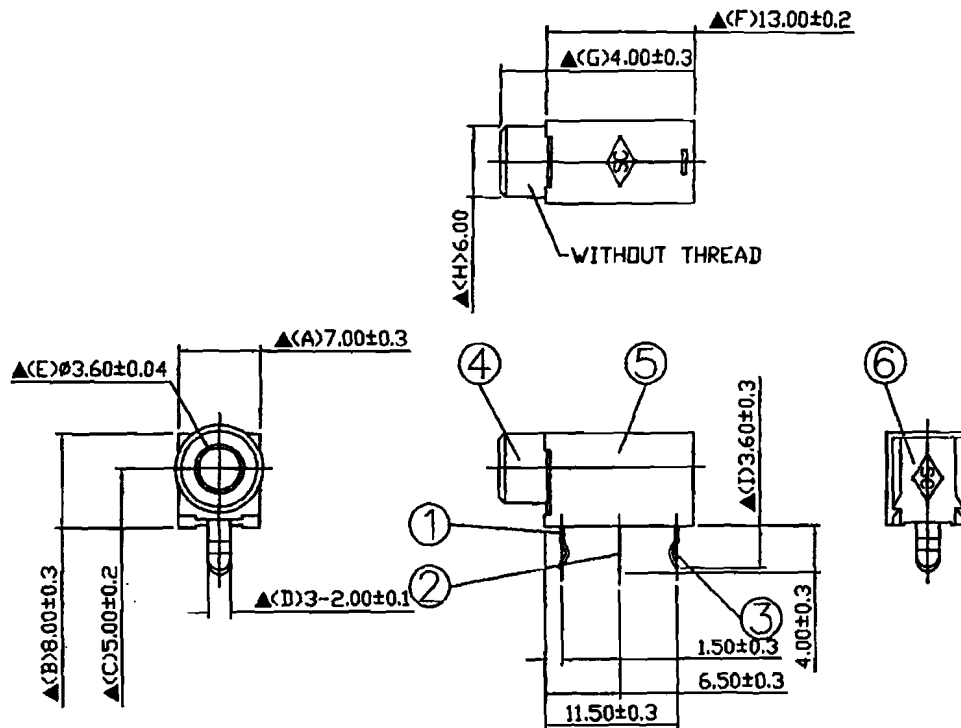



SCHEMATIC	
MODEL NO	Y



Pin Hole Layout
(Jack Bottom View)

6	Cover	PaM	1	Black Color
5	Housing	PBT	1	Black Color
4	Barrel(V/Thread)	Brass	1	Nickel Plated
3	Break Terminal	0.3T Brass	1	Silver Plated
2	Tip Spring	0.2T Phosphor Bronze	1	Silver Plated
1	Earth Terminal	0.3T Brass	1	Silver Plated
NO	Description	Material	Q'TY	Finish

		DATE	DWN	CHKD
		12.08.2005	易愛娣	
PART NAME: 3.5Ø PHONE JACK				
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED			UNIT:mm	

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstanding Voltage: AC 500V for one minute
Remark: ▲: The Most Important Dimension

SHOGYO INTERNATIONAL CORP.
SCJ357M0NYS0B00G